


VZ-CSE1202

OUTPUT 50V DC / 25W PoE INJECTOR

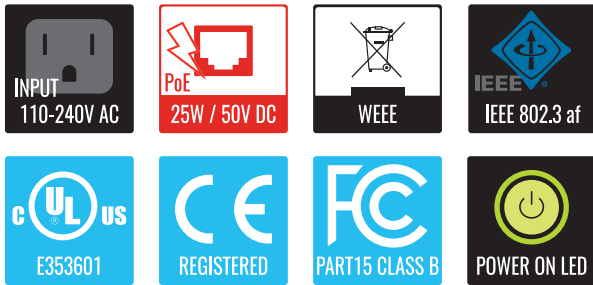

VZ-CSE1202 ADVANTAGES

- Compatible with **VZ-PVM-I1W4N / VZ-PVM-I1B4N (10" PoE IP-PVM)**
- Standard, **IEEE 802.3 af**
- Supports 10/100/1000 Base-T applications
- Output power - 50V ∓ 25W
- Internal AC/DC converter
- Passive Plug & Play
- Compact design fits easily in WLAN access point and IP cameras installations
- Compact & Light-weight
- Safe: low power devices receive only the power they need
- Safety : UL Listed E353601
- EMI : FCC Class B

MODEL #	VZ-CSE1202
DISPLAY	
Pass Through Data Rates	10/100/1000 Mbps
No. of Channel	1
Input Power Requirements	AC Input Voltage: 100 to 240 V AC @ 50-60 Hz AC Input Current: 0.5A @ 100-240V AC AC Frequency: < 60A Peak @ 120VAC, < 120A Peak @ 230VAC
INTERFACE	
Power Input	110 to 240 V AC @ 50-60 Hz
Ethernet	RJ45 Shielded Socket
DIMENSIONS & WEIGHT	
Outline Dimension (W x H x D)	3.34 x 1.69 x 1.29" / 85 x 43 x 33 mm
Net / Gross Weight	0.2 lbs (0.09 kg) / 0.5 lbs (0.23 kg)
POWER OVER ETHERNET (PoE) OUTPUT	
2-Pair Powering	Pins 4, 5 (+) and Pins 7, 8 (-)
Output Power Voltage	50V DC
User Port Power	25 Watts
GENERAL	
Construction	PC material
Operating Temperature	32 ~ 104°F / 0 ~ 40°C
Operating Humidity	Max. 80% Non-condensing
Storage Temperature	-40 ~ 158°F / -40°C ~ 70°C
Storage Humidity	Max. 80% Non-condensing
AC Connector	IEC-320 C6
Data IN / POE	RJ45 Shielded Socket
Regulations	UL Listed E353601

10" IP PVM - 1 MONITOR		
Monitor Model	VZ-PVM-I1W4 / VZ-PVM-I1B4N	
Cable Type	Cat 6	
ft / meter	50 ft / 15.24 m	tested
	100 ft / 30.48 m	tested
	150 ft / 45.72 m	tested
	200 ft / 60.96 m	tested
	300 ft / 91.44 m	tested

PRECAUTIONS



Risk of electric shock - Do not open the body.

Contact ViewZ

- Address : 177 W. Orangethorpe Ave., Placentia, CA 92870
- Phone : (714) 996-1177, Fax : (714) 996-1138
- Sales : sales@viewzusa.com