






SECURITY & PRO A/V DISPLAY PRODUCTS

For the most powerful, scalable security solutions – connect with ViewZ

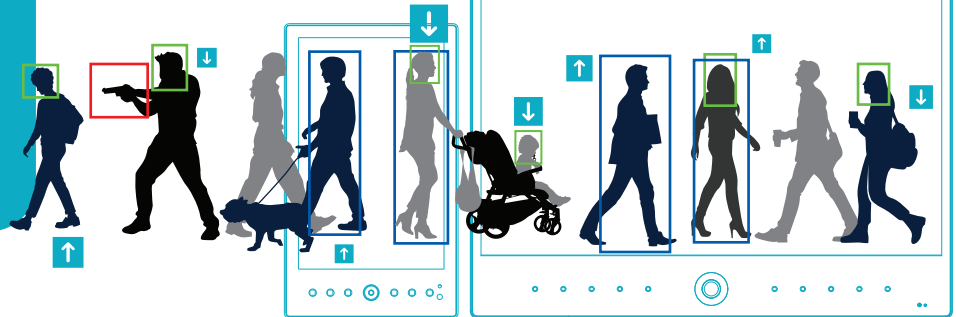

ViewZ[®]
DRIVING VISUAL INNOVATION
VER.3.0



TOTAL SECURITY SOLUTION PROVIDER

ViewZ is a leading designer and OEM manufacturer of premium video and display solutions for professional installations. For nearly 23 years, our commercial-grade LCD and LED monitors have earned the reputation as premium display products around the world in commercial installations.

ViewZ specializes in the security sector, offering over 100 monitors from small desktop units to large scale video-wall displays.

Our monitors utilize the latest in LED backlight technology and include unique & innovative features such as heavy duty metal housing, security specific display modes and IP connectivity.

The letters 'AI' in a large, light blue, sans-serif font. Behind the letters are faint, light blue circuit board traces and small square nodes, suggesting a technological or artificial intelligence theme.

ViewZ offers a comprehensive line of professional products in the following categories.

- Smart AD Public View Monitors (PVM)
- AI, IP & Analog Public View Monitors (PVM)
- Professional CCTV Monitors
- Security Videowall Displays
- Videowall Processors & Multiviewer
- IP Input & Output Monitors
- Hybrid DVRs & Cameras
- Lenses & Mounts

CONTENTS

■ 01 PUBLIC VIEW MONITORS

AI IP Public View Monitors : 10 ~ 43"
Full HD Public View Monitors : 10"
Smart AD Public View Monitors : 13 ~ 43"

■ 02 IP INPUT & OUTPUT MONITORS

IP Input Monitors
IP Output Monitors

■ 03 COMMERCIAL GRADE CCTV SECURITY MONITORS

IP Test Monitor & Professional Security Monitor
Temperature Check Monitor
4:3 Professional Security Monitors
3G-SDI & 16:9 Professional Security Monitors
Curved Monitor

■ 04 4K MONITORS

4K Monitors
Interactive 4K Monitors (Touch Screen)
Premium Touch Monitors

■ 05 CCTV VIDEO WALL

Full HD Video Wall Monitors : 49 ~ 55"
CCTV Video Wall Controllers
IP-Based CCTV Video Wall Controllers
Multi Viewer : 4 & 8 Channels
Video Wall Accessories - Extender & Custom Mounts

■ 06 LED VIDEO WALL

LED Tile
LED Video Wall Controller

■ 07 MOUNTING

Wall Mounts
Pole Mounts
Ceiling Mounts

■ 08 POWER & ACCESSORIES

Hybrid DVR - 8/16 ch AHD / TVI / CVBS
PoE & Power Supply
Full HD Cameras - 3G-SDI / AHD / TVI / CVI / CVBS

Unlike consumer models, ViewZ monitors are engineered for continuous usage and backed by our industry leading 3 year advance replacement warranty.

ViewZ focuses on offering private labeling with a number of globally recognized commercial brands currently private labeling their products.

Innovative Solution in Provider

AI Public View Monitors,
Smart AD PVM & more

TOP 1

Years of History
Founded in 2007

19

IP Input & Output Monitors

Sequential & 16ch viewing
mode, Loss prevention &
employee monitoring

IP

WARRANTY, RMA SERVICE & TECHNICAL SUPPORT





Detect a Gun



IP Based AI Public View Monitors

Discover Effortless Analysis with Precise & Autonomous AI

Strengthen your security posture by staying ahead of the curve with our future-ready object classification solutions.



Gun Detection

Gun Detect saves lives through early gun and active shooter detection, human verification, mass communication & automated response.



Face Detection

Used for various surveillance purposes, self-enrollment for access control, and personalized user experiences without infringing on privacy rights.



People Counting

Know exactly how many people come and go. You can find the difference between the estimated and actual floating population.



Alert to every AI PVM

AI PVM system can be integrated with existing alert system on your facilities. By setup of AI PVM, you can easily manage safety alert system.



Quick & Confident Alert System

AI PVM's comprehensive notification system integrates with your business technology stack for a fast and stress-free process to create, test, and deploy emergency or routine alerts to multiple channels.



Smarter PVM, Smarter Security

AI PVM supports the required security features such as, Intrusion, Motion Detection, Single/double Line Crossing, Multi-Loitering, Wrong-Way, Single Bad, Gun Detection, People Count & more.



VZ-PVM-A1W4N / A1B4N

Gun / Face / Full Body Detect
Emergency Alert / IMS(CMS) SW



- Screen Size 10.1"
- 1280 x 800 Resolution Panel
- 2 MP FHD camera
- Built-in 2.8 mm Fixed Lens
- PoE Protocol: IEEE 802.3AF/AT
- 8 RGBW LED Flashing Light
- People Count, Media Player
- On-Screen & Customized Banner
- Recording Available with Micro SD
- Video Obstruction / Video Loss / Door Open / Power Loss Alarm
- RJ45 ONVIF IP Output
- VESA 75 x 75 mm
- PoE Power (37-52 V)
- Optional PoE Injector (VZ-CSE1202)



VZ-PVM-A1W4P / A1B4P

Gun / Face / Full Body Detect
Emergency Alert / IMS(CMS) SW



- Screen Size 10.1"
- 800 x 1280 Resolution Panel
- 2 MP FHD IP camera
- Built-in 2.8 mm Fixed Lens
- PoE Protocol: IEEE 802.3AF/AT
- 6 RGBW LED Flashing Light
- People Count, Media Player
- On-Screen & Customized Banner
- Recording Available with Micro SD
- Video Obstruction / Video Loss / Door Open / Power Loss Alarm
- RJ45 ONVIF IP Output
- VESA 75 x 75 mm
- PoE Power (37-52 V)
- Optional PoE Injector (VZ-CSE1202)



VZ-PVM-A2/A3/A4 W3N/B3N

Gun / Face / Full Body Detect
Emergency Alert / IMS(CMS) SW



- Screen Size 24, 27 & 32"
- 1920 x 1080 Full HD Resolution Panel
- 2 MP FHD IP camera
- DC Auto Iris 2.8-12 mm Varifocal Lens
- 8 & 10 RGBW LED Flashing Light
- People Count, Media Player
- On-Screen & Customized Banner
- Recording Available with Micro SD
- Interval Based Source Switching
- RJ45 ONVIF IP Output, Camera Out, AV (Composite) In, HDMI In, VGA In, Audio In/Out
- VESA 100 x 100 mm (24" & 27"), 200 x 200 mm (32")
- PoE++ (Type 3 & 4) / DC 24V (AC110V-240V with DC adapter)
- DC 12V Out (Camera Use)



VZ-PVM-A5W3N / A5B3N

Gun / Face / Full Body Detect
Emergency Alert / IMS(CMS) SW



- Screen Size 43"
- 1920 x 1080 Full HD Resolution Panel
- 2 MP FHD IP camera
- DC Auto Iris 2.8-12 mm Varifocal Lens
- 10 RGBW LED Flashing Light
- People Count, Media Player
- On-Screen & Customized Banner
- Recording Available with Micro SD
- Interval Based Source Switching
- RJ45 ONVIF IP Output, Camera Out, AV (Composite) In, HDMI In, VGA In, Audio In/Out
- VESA 200 x 200 mm
- 110V AC / DC 24V (AC110V-240V with DC adapter)
- DC 12V Out (Camera Use)



VZ-PVM-Z1W5M

Motion Detection
Video Loss / Door Open Alarm



- Screen Size 10.1"
- 1280 x 800 Resolution Panel
- Built-in 2.0 Mega Pixel Camera
- 2.8 mm Fixed Lens
- 960 TV Line - Analog Video Resolution
- Blinking Indicator LED (Blue, Red, Purple)
- Blinking Message "Recording"
- Media Player
- VESA 100 x 100 mm




VZ-PVM-I1W4N / I1B4N

People Count / Gun Detect
Face Detect / Intrusion



- Screen Size 10.1"
- 1280 x 800 Resolution Panel
- WDR 2 MP FHD IP camera
- Built-in 2.8 mm Fixed Lens
- PoE Protocol: IEEE 802.3AF/AT
- Video Obstruction / Video Loss / Door Open / Power Loss Alarm
- Recording Available with Micro SD
- RJ45 ONVIF IP Output
- VESA 75 x 75 mm
- PoE Power (37-52 V)
- Optional PoE Injector (VZ-CSE1202)



VZ-PVM-I2/I3/I4 W3N/B3N

People Count / Gun Detect
Face Detect / Intrusion



- Screen Size 24, 27 & 32"
- 1920 x 1080 Full HD Resolution Panel
- WDR 2 MP FHD IP camera
- 2.8 - 12 mm Varifocal Lens Built-in
- Camera Motion Sensor & Time Interval Based Source Switching
- Recording Available with Micro SD
- RJ45 ONVIF IP Output, CVBS In/Out, HDMI In, VGA In, Audio In/Out
- VESA 100 x 100 mm (24" & 27"), 200 x 200 mm (32")
- PoE++ (Type 4) / DC 24V (AC110V-240V with DC adapter)
- DC 12V Out (Camera Use)



VZ-PVM-I5W3N / I5B3N


People Count / Face Detect
Face Detect / Intrusion



- Screen Size 43"
- 1920 x 1080 Full HD Resolution Panel
- WDR 2 MP FHD IP camera
- 2.8 - 12 mm Varifocal Lens Built-in
- Camera Motion Sensor & Time Interval Based Source Switching
- Recording Available with Micro SD
- RJ45 ONVIF IP Output, Camera Out, AV (Composite) In, HDMI In, VGA In, Audio In/Out
- VESA 200 x 200 mm
- 110V AC / DC 24V (AC110V-240V with DC adapter)
- DC 12V Out (Camera Use)

SMART AD PVM


A Whole New Way of Merging Advertising
& Security for Retail Environments

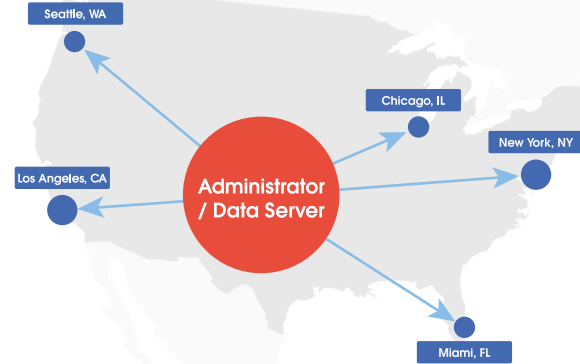

Smart AD PVM's license-free CMS software is a user friendly central management software that allows an administrator to upload and manage signage contents over the wide area network to multiple units in different locations from a centralized location.

Smart AD PVM by ViewZ is a CMS capable PVM solution with advanced digital signage features designed for multi-location retails that rely on central management of signage contents.

* Available Display Modes



A : PVM Camera
B, C, D: Media Content





- **Powerful Remote Control**
One Server Control Unlimited Smart AD PVMs
- **Convenient Management**
License-Free, User Friendly
- **Alert System**
Emergency, Control & Alert Process
- **New Innovation in Retail Digital Signage**
Seamless Integration of Security & Digital Signage
- **Variable Source Selection**
Image & Video files, Built-in Camera, RSS, News Ticker, Live Streaming Video & More



COLOR
Options
○ ●

VZ-PVM-P1W3/P1B3/P2W3/P2B3

Security Alert System / Motion Detection
Portrait & Landscape Viewing Mode



- Screen Size 13.3 & 15.6"
- 1080x1920 Portrait Full HD Resolution Panel
- WDR 2.1MP FHD IP camera
- 2.8 mm - 12 mm Varifocal Lens Built-in
- RJ45 x 2 (ONVIF IP Output and CMS), CVBS Out, Micro SD Card In
- ViewZ CMS Software Provided
- Onvif Profile S Compliant
- VESA 100 x 100 mm
- DC 24V & DC 12V
(AC110V - 240V with DC adapter)
- Optional Server
VZ-OLI-Mini or ViewZ Cloud Server




COLOR
Options
○ ●

VZ-PVM-P4W3/P4B3/P5W3/P5B3

Security Alert System / Motion Detection
Portrait & Landscape Viewing Mode



- Screen Size 32 & 43"
- 1080x1920 Portrait Full HD Resolution Panel
- WDR 2.1MP FHD IP camera
- 2.8 mm - 12 mm Varifocal Lens Built-in
- RJ45 x 2 (ONVIF IP Output and CMS), CVBS Out, Micro SD Card In
- ViewZ CMS Software Provided
- Onvif Profile S Compliant
- VESA 200 x 200 mm
- AC 100V & DC 24V
(AC110V - 240V with DC adapter)
- Optional Server
VZ-OLI-Mini or ViewZ Cloud Server



VZ-24IPM & 32IPM


16ch1080p Multiview & Sequential Viewing Mode Available (via ViewZ App)



- 24" – 1080p Panel / 32" – 2160p Panel
- Full HD 1080p Resolution
- IP (RJ-45) In, HDMI In/Out, USB, Blue-Tooth
- Rec, PTZ Control via ViewZ App
- Built-in Android OS
- Designed to Run **Android Apps**
- Cost-Effective Alternative to Remote Viewing PC
- Designed to Run Android Apps
- ViewZ App Supports Over 22,000 IP Camera Models
- Support **Dual Voltage** (PoE & DC 12V)
- Built to run 24/7/365



Support
Over 22,000 IP Cameras

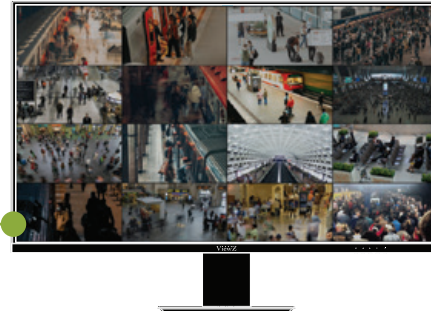

Multi Channel & Sequential Viewing Modes

UP TO **16 CAMERAS VIEWING** AVAILABLE &
SEQUENTIAL VIEWING AVAILABLE (ViewZ App)



SPOT Monitoring
VZ-IPM series the ultimate spot monitoring solution for displaying multiple IP cameras in the spot monitor mode.



REMOTE VIEWING
without a PC


ALL-IN-ONE REMOTE VIEWING SOLUTION BRINGS DOWN COST

With just one equipment and no Windows license to deal with, you can benefit from additional visibility to your surveillance system at reduced costs.

IPM series
**REMOTE VIEWING &
SPOT MONITORING**



RECORDABLE CALL-UP MONITOR



Quick
Story Boarding



Admin
Surveillance

ViewZ introduces the industry's first monitor with built-in encoding capability. The D2IP series is designed to enroll the monitor as if it were a camera into your VMS/NVR. What you see on screen is what you record ! A simple solution for loss prevention story-boarding, auditing and internal investigations.



VZ-215D2IP-L


Perfect for Employee Monitoring
Easy "Story-Boarding" for Loss Prevention



- Screen Size 21.5"
- Full HD 1080p Resolution
- **Streams** what's on the **Screen**
- **Streams like a Camera** via Ethernet 10/100
- Designed to Run Android Apps
- HDMI In, IP (RJ-45) Out
- Support HDMI Resolution
480p / 720p / 1080p / 4K
- Assignable Control Buttons
- Built to run 24/7/365



Streams like a Camera via Ethernet 10/100 & Quick Story Boarding

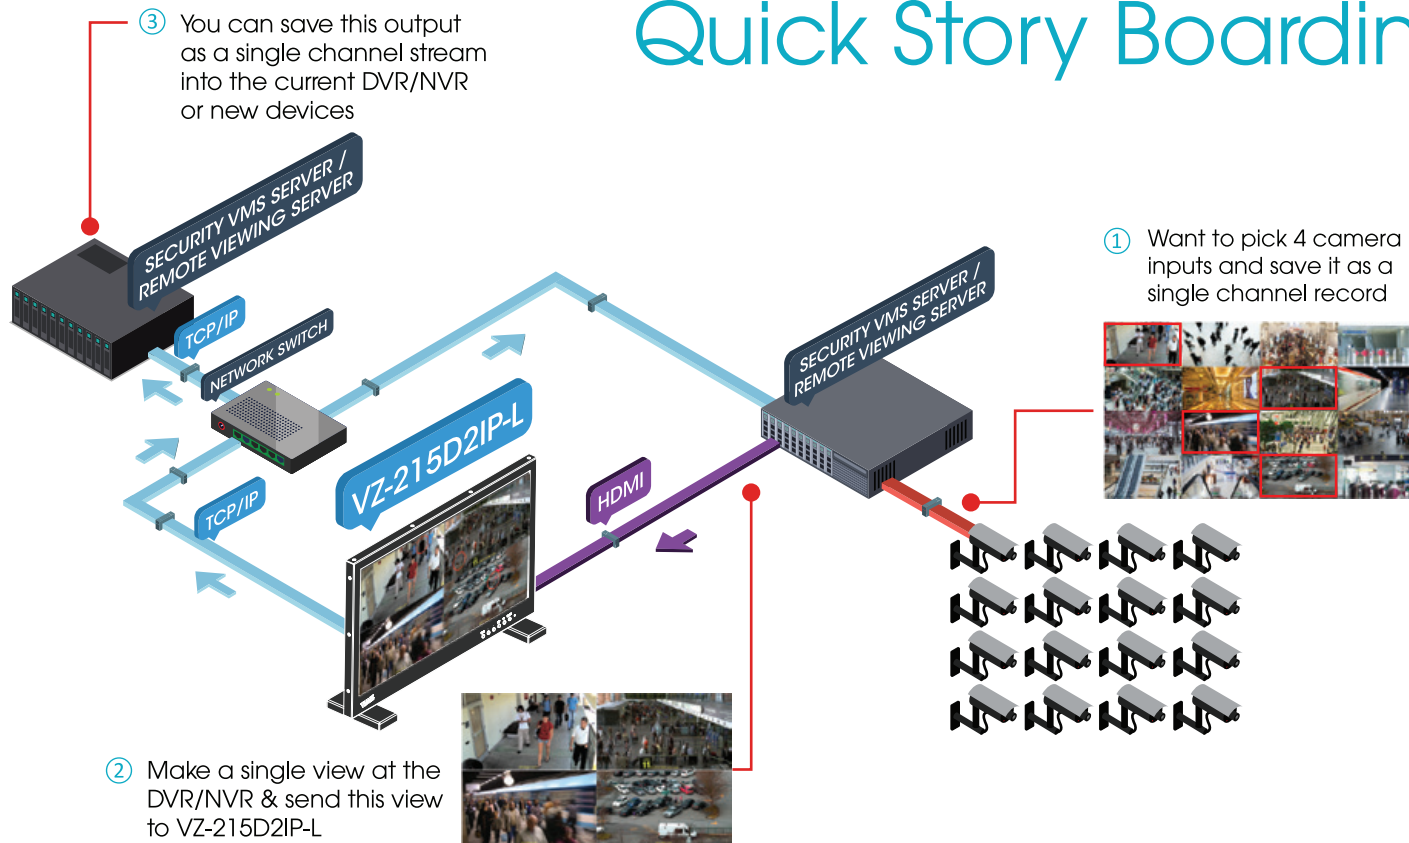

PROFESSIONAL SECURITY

MONITORS

24/7/365 Operation and 3 Year Factory Warranty

ViewZ professional security monitors are built with commercial grade "A" panels that have superior color reproduction along with much higher reliability and longer life span. Built to run 24/7/365, ViewZ monitors are made to last and backed by our 3 year factory warranty.





VZ-19CMP

3D Comb-filter, De-Interlace
16:9 / 4:3 Ratio Available



- Screen Size 19"
- 1080p Full HD Resolution
- HDMI, VGA, USB, Audio In / Out
- 1 CVBS (BNC) Input / Output (Loop-through)
- Built-in Speakers
- Auto Source & Power Recovery
- Built to run 24/7/365
- VESA 100 x 100 mm
- DC 24V Adapter (AC 100-240V, 50/60Hz)



VZ-22 / 24 / 27CMP

3D Comb-filter, De-Interlace
16:9 / 4:3 Ratio Available



- Screen Size 22, 24 & 27"
- 1080p Full HD Resolution
- HDMI, VGA, USB, Audio In / Out
- 1 CVBS (BNC) Input / Output (Loop-through)
- Built-in Speakers
- Auto Source & Power Recovery
- Built to run 24/7/365
- VESA 75 x 75 mm (VZ-22/24CMP)
- VESA 100 x 100 mm (VZ-27CMP)
- DC 24V Adapter (AC 100-240V, 50/60Hz)



VZ-32CMP

3D Comb-filter, De-Interlace
16:9 / 4:3 Ratio Available



- Screen Size 32"
- 1080p Full HD Resolution
- HDMI, VGA, USB, Audio In / Out
- 2 CVBS (BNC) Input / 1 Output (Loop-through)
- Built-in Media Player
- Built-in Speakers
- Auto Source & Power Recovery
- Built to run 24/7/365
- VESA 100 x 100 mm
- DC 24V Adapter (AC 100-240V, 50/60Hz)



VZ-43CMP

3D Comb-filter, De-Interlace
16:9 / 4:3 Ratio Available



- Screen Size 43"
- 1080p Full HD Resolution
- HDMI, VGA, USB, Audio In / Out
- 2 CVBS (BNC) Input / 1 Output (Loop-through)
- Built-in Media Player
- Built-in Speakers
- Auto Source & Power Recovery
- Built to run 24/7/365
- VESA 200 x 100 mm
- DC 24V Adapter (AC 100-240V, 50/60Hz)





VZ-27CGM

Ultra wide 1500R Curved Screen
Supports HDR 10



- Screen Size 27"
- UWQHD (3440x1440) Resolution
- High Response Time - 1ms
- Support MPRT
- Display Port (1.2) In x2, HDMI (2.0) In x2, Audio Out x1
- VESA 100 x 100 mm



VZ-34CGM

Ultra wide 1500R Curved Screen
Supports HDR 10



- Screen Size 34"
- UWQHD (3440x1440) Resolution
- High Response Time - 1ms
- Support MPRT
- Display Port (1.2) In x2, HDMI (2.0) In x2, Audio Out x1
- Supports PIP / PBP
- Tilt 15° ~ -5°, Swivel ± 30°, Height Adjustment 4.48" (114 mm)
- VESA 75 x 75 mm



VZ-49CGM

Ultra wide 3800R Curved Screen
Supports HDCP 2.3



- Screen Size 49"
- Dual QHD (5120x1440) Resolution
- High Response Time - 1ms
- Support MPRT
- Display Port (1.4) In 1, HDMI (2.1) In x1, Audio Out x1, USB (Type B) x 1, USB (Type A) x 4, USB (Type C - Video & 65W PD) x1
- Supports PIP / PBP
- A built-in Anti-Flicker Free Function
- Tilt 5° ~ -15°, Swivel ± 45°
- Height Adjustment 5.9" (150 mm)
- VESA 100 x 100 mm



VZ-215LED-L1

Center Marker / Corner Marker
Safety Area Marker



- Screen Size 21.5"
- 1920x1080 Full HD Resolution
- HDMI, VGA, COMPONENT SD/HD/3G-SDI (Level A)
- Built-in 2 Speakers
- SDI Embedded Audio Level Meter / 2ch Displays (out of 16ch)
- Blue Mono, Pixel to Pixel
- Zero Scan, Over Scan
- Front Function Assignable Button
- Built to run 24/7/365



VZ-7IPTM

Supports H.265, H.264 and 4K
Onvif IP (DHCP, manual IP Setup)



- Screen Size 7"
- 1280x800 HD Resolution
- Wifi Connection & Touch Screen
- Hybrid - 5MP TVI, 4MP CVI, 4MP AHD & HD-SDI/EX-SDI Test
- Support Analog (CVBS) Video Test with NTSC/PAL
- CVBS Loop Test
- IPC, IPC Viewer, RJ45 TDR Test
- Rapid Video, RTSP, IP Discovery
- RS485 (Pelco PTZ Control)
- P.o.E. Test - PD & PSE
- High Capacity Power with
- Lithium Battery (10 hours)
- Built to run 24/7/365



VZ-7TIM-S

2MP Camera Built-in
Automatic Face Detection



- Screen Size 7"
- Face Recognition
(Up to 22,400 Face Data Base)
- Up to 100,000 People Records
- Supports Wiegand Output - WG26 & WG34 format
- Optional Floor Stand or Desktop Stand
- Non-contact Access Control Monitor
- Supports Alarm System
- IP34 Dust & Water Proof



VZ-101RTC

2D Comb-filter, Noise Reduction
16:9 / 4:3 Ratio Available



- Screen Size 10.1"
- 1024x600 HD Resolution
- BNC, HDMI, VGA, TRIGGER
- Built-in Speakers
- Built to run 24/7/365
- VESA 75 x 75 mm



VZ-17RTN & 19RTN

3D Comb-filter, De-Interlace
16:9 / 4:3 Ratio Available



- Screen Size 17 & 19"
- 1280x1024 HD Resolution
- 600 TV Line
- HDMI, VGA
- 2 BNC(Composite) Inputs / 1 BNC (Composite) Output (Loop-through)
- Built-in Speakers
- Auto Source & Power Recovery
- Built to run 24/7/365
- VESA 75 x 75 mm

4K⁶⁰ IBX-T series

INTERACTIVE 4K Monitors



20 Point Multi Touch

IBX-T monitors provide ultra touch sensitivity to allow for smooth and latency-free touch and stylus-based writing operations

Android OS

IBX-T monitors run on Android OS and allows any Android supported apps to be installed and used.

True Digital Whiteboard

IBX-T monitors is a true digital white boarding solution that supports stylus or hand writing and comes with an advanced writing app.

Commercial Grade Panel

As with all ViewZ professional display products, IBX-T monitors feature commercial grade panels to ensure maximum product longevity and around the clock operation and usage.

Screencasting

IBX-T monitors also allow for wireless content sharing from a PC or Apple computer using third party USB dongle such as Chrome Cast.

Content Sharing

IBX-T monitors allow for easy content sharing from a PC or Apple computer. By connecting the PC or Apple computer via hardwire connection using HDMI and USB cables, you can display and control contents on those devices with touch operation.



OPS-PC Option

75, 86, 98"
20 Point Multi Touch



VZ-75IBX-T / 86IBX-T / 98IBX-T

Screen Sharing Software
Digital White Board



- Screen Size 75, 86 & 98"
- 4K (3840x2160) Resolution
- Supports Play Store (Google)
- Supports Zoom Meeting & Microsoft Teams
- HDMI 2.0 In x3 / HDMI 2.0 Out x1
DP In x1, VGA In x1, USB Type-C In x2
USB 3.0 In x4, USB 2.0 In x1, RJ45 In x2
RS232 (DB 9) In x1, Touch Type B In x2
- Conference System
(Built-in Camera, Mic)
- 20-Point Interactive Touch Panel
- VESA 600 x 400 mm (VZ-75IBX-T),
800 x 400 mm (VZ-86IBX-T),
800 x 600 mm (VZ-98IBX-T)
- Supports OPS (Option)



VZ-FSM-IBX

Mobile Freestanding Mount
Display Range 75 ~ 86"



- Load Capacity 176.37 lbs / 80 kg
- Universal Mounting
- VESA 100 x 100 ~ 1100 x 600 mm
- Designed specifically for
VZ-75IBX-T & VZ-86IBX-T

MCT series OUTDOOR TOUCH SCREEN



VZ-07MCT & 010MCT

10-Point Capacitive Touch Screen
Dust & Water Proof Rating IP65



- Screen Size 7" & 10.1"
- Full HD 1080p LED Resolution Panel
- Auto Dimming
- Support HDR, Marker, Scan, Aspect, Zoom, Freeze & Image Flip
- HDMI (1.4) In x1, VGA In x1, USB (Type-C) In x1
- Supports HDR10-100, HDR10-1000, HDR10-10000 & HLG
- Color Temperature - 9300°K, 7500°K, 6500°K and built-in user





VZ-015MCT & 22MCT

10-Point Capacitive Touch Screen
Dust & Water Proof Rating IP65



- Screen Size 15.6" & 22"
- Full HD 1080p LED Resolution Panel
- Auto Dimming
- Support HDR, Marker, Scan, Aspect, Freeze & Image Flip
- HDMI (1.4) In x1, VGA In x1, AV In x1, Audio In x1
- Supports HDR10-100, HDR10-1000, HDR10-10000 & HLG
- Color Temperature - 9300°K, 7500°K, 6500°K and built-in user

PREMIUM TOUCH MONITOR

The monitor comes with a 10-point touch screen and 1000 nits high brightness screen panel. The interface supports a wide range of customization options in addition to the existing types such as HDMI, VGA & AV. The front panel of MCT series has IP65 front panel design in a great convenience for installation methods and applications.





Powerful & Highly Configurable Video Wall Controllers with Maximum Reliability

CCTV VIDEO WALL & CONTROLLER

ViewZ PRO series CCTV video wall controllers are built to deliver maximum performance, reliability and user-friendliness. PRO series controllers can be controlled remotely from a central location via controller software that also has the ability for multi system/site management.



VZ-49UNBS / 55UNBS

Ultra Narrow 1.2 mm Metal Bezel
Landscape & Portrait View



- Screen Size 49 & 55"
- Accepts up to 4K (3840x2160)
- Daisy Chain - HDMI up to 15x15
- HDMI (2.0) In/Out, DVI-D In, DP In, VGA-In, RS-232 In/Out, Audio Out
- Mullion Compensation
- Advanced Heat Management
- Supports HDCP 1.4 / 2.2
- Auto Source & Power Recovery
- VESA - 600 x 400 mm



VZ-55ENB / 55EHB

Extreme Narrow 1.2 mm Metal Bezel
Landscape & Portrait View



- Screen Size 55"
- Accepts up to 4K (3840x2160)
- Daisy Chain - HDMI up to 15x15
- HDMI (2.0) In/Out, DVI-D In, DP In, VGA-In, RS-232 In/Out, Audio Out
- Mullion Compensation
- Advanced Heat Management
- Supports HDCP 1.4 / 2.2
- VESA - 600 x 400 mm
- VZ-55ENB (500 cd/m²)
- VZ-55EHB (700 cd/m²)



VZ-55SNB / 55SHB

Super Narrow 1.2 mm Metal Bezel
Landscape & Portrait View



- Screen Size 55"
- Accepts up to 4K (3840x2160)
- Daisy Chain - HDMI up to 15x15
- HDMI (2.0) In/Out, DVI-D In, DP In, VGA-In, RS-232 In/Out, Audio Out
- Mullion Compensation
- Advanced Heat Management
- Supports HDCP 1.4 / 2.2
- VESA - 600 x 400 mm
- VZ-55SNB (500 cd/m²)
- VZ-55SHB (700 cd/m²)

UNBS

1.2 mm Ultra Narrow bezel
CCTV video wall displays


EHBENB

0.9 mm Extreme Narrow bezel
CCTV video wall displays

SHBSNB

0.44 mm Super Narrow bezel
CCTV video wall displays





VZ-49UHD / 55UHD / 65UHD

Landscape & Portrait View
Quad View



QUAD VIEW



Portrait & Landscape

① FEATURES & HIGHLIGHTS

UHD series provides a perfect solution for smaller scale security video wall in applications with limited wall & desktop space.

- Landscape & Portrait View
- PBP, PIP & Quad View
- IPS Panel for Wide Viewing Angle
- Built-In Media Player
- Digital Signage

- Screen Size 49, 55 & 65"
- 3840x2160 4K Monitor
- HDMI 2.0 (3840x2160 @60Hz), HDMI 1.4 (3840x2160 @30Hz), DP (3840x2160 @60Hz)
- HDMI In x2, DP In/Out x2/1, RS-232 (RJ-45) In/Out x1/1, Audio Out x1, USB In x2, SD Card In x1, OPS (Option) x1
- Narrow bezel - VZ49UHD (9.1 mm), VZ-55UHD (11.4 mm), VZ-65UHD (7.5 mm)
- Built-in Media Player (USB, SD Card)
- VESA 400 x 400 mm

series
4K⁶⁰ UHD

4K Security & Signage Monitors




VZ-PRO-ST

Video Wall Controller
4 / 7.5 / 10 / 15 RU



- 1080p Full HD Resolution up to 144 Input / 72 Output
- Input: HDMI 1.3 (1080p @60Hz), DVI-D (1080p @60Hz) or RJ-45 (1080p x 8)
- Output: HDMI 1.3 (1080p @60Hz) or DVI-I (1080p @60Hz)
- Pure Hardware Structure and High Stability (No OS)
- Remote Controller Software (DIMS Client SW)
- Serial Control RS-232C Available

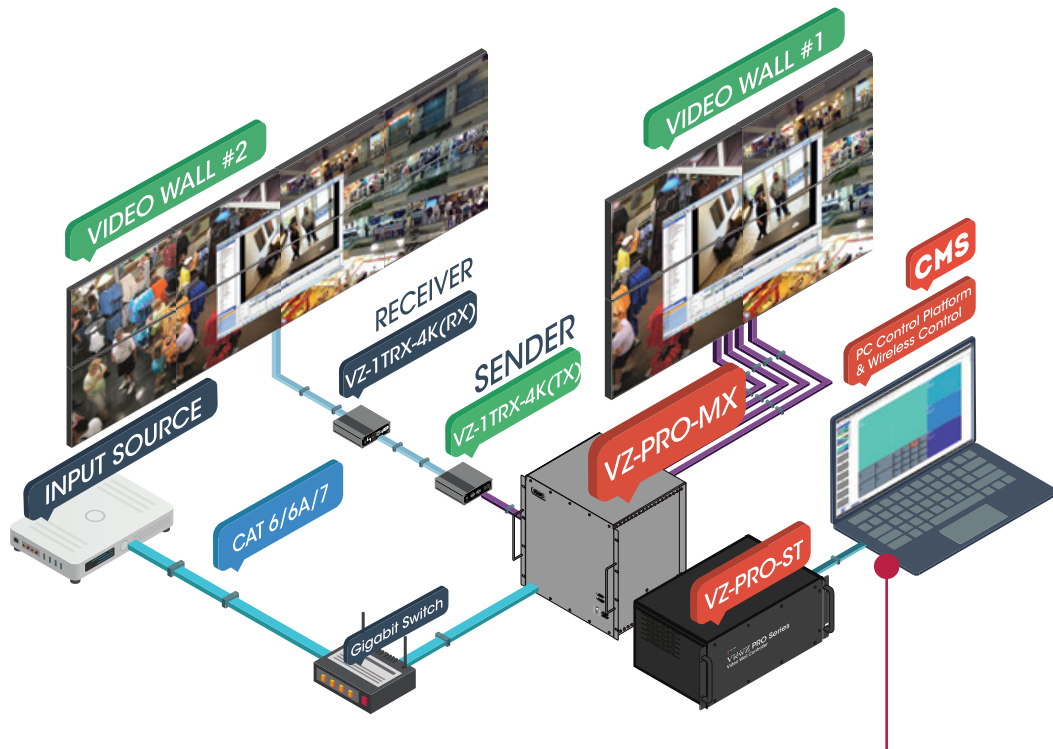

License-Free Controller Software

VZ-PRO series' controller software is a powerful and user-friendly software that comes bundled with PRO series servers. It's also license-free, which means there are no recurring renewal fees that typically increase the cost of ownership. The software offers several key crucial video wall features including scaling, creating & saving templates and scheduling.

Highly Configurable Inputs & Outputs

VZ-PRO series video wall controller are highly configurable and can be built with standard 4, 6, 8, 16, 32, 48, 64, 128 input & 4, 8, 16, 32, 48, 64, 128 output configurations as well as staggered number of inputs and outputs with up to 128 Inputs and 128 outputs on a single server.



VZ-PRO-MX

Video Wall Controller
8 / 12 / 18 / 24 RU

- 3840x2160 4K Resolution up to **152 Input / 160 Output**
- Input: HDMI 2.0 (4K @60Hz), HDMI 1.4 (4K @30Hz), HDMI 1.3 (1920x1080 @60Hz), DVI (1920x1080 @60Hz) or RJ-45 (4K 4ch/H.264, H.265)
- Output: HDMI 2.0 (4K @60Hz), HDMI 1.4 (4K @30Hz), HDMI 1.3 (1920x1080 @60Hz), DVI (1920x1080 @60Hz) or HDBase-T (1920x1080 @60Hz)
- Remote Controller Software (Multiview Software)
- Pure Hardware Structure, no OS & High Stability



VZ-PRO-IP 4x12

4K IP Decoded Controller
VZ-PRO-IP4x12- HDMI 4 In/12 Out

- Resolutions up to HDMI 4K@60Hz for Input & Output
- H.265, H.264 & MPEG4 Video Format
- Upto 36 Windows per Each Output Channel
- Max decoding resolution, up to 4ch 8K @30Hz, 128ch 1080 @30Hz Capability for Each Channel
- G.711A and G.711U Formats
- High Decoding Efficiency & Clear Images
- Decoding SD & HD Video
- Decoding Stream of Onvif Protocol
- Multicast
- ON/OFF Video Wall Screens



VZ-PRO-IPST

IP Based Video Wall Controller
VZ-PRO-100E (Encoder)
VZ-PRO-100D (Decoder)
VZ-PRO-1070 (Server)

- 1920x1080 Full HD Max Resolution
- HDMI In (1920x1080 @60Hz), Audio In (MIC), USB(KVM), RS232, IR Out
- H.264 Video Format
- Up to 200 pcs Encoders & Decoders
- Up to 48 Separate Videos
- LED sender Box Frame Synchronization
- Image Rotation Capability - 90°, 180° & 270°
- Remote Control Software for TCP/IP - Upto 8 Users
- Remote Control Software for Wifi - Upto 4 Users



VZ-1TRX-4K

HDMI Extender over CAT 6
HDR (HDR 10 + Dolby)



- New ipcolor Technology
- Resolutions up to 4K@60Hz (8/10/12 bit)
- Transmits to distances up to 230 feet (70 m)
- HDMI Loop-through at Transmitter
- IR In/Out
- SPDIF / ARC Selection
- Zero Latency



VZ-MV401

Multiviewer - HDCP 1.4 / 2.2
14 Layouts - 6 Presets & 8 Custom

- 4 HDMI In / 1 HDMI Out
- Resolution up to 4K@60Hz, 4:4:4 Color sampling
- Scaling up to 4K@60Hz, 4:4:4 Color sampling
- HDMI In x4, Serial Port (RS-232) In, RJ-45, Audio R&L, HDMI Out x1
- Rotation (R-90° and L-90°)
- Flip, PIP & POP
- Front Panel Button
- IR remote control
- RS232 & Web UI



VZ-MV802

Multiviewer
Up to 30 Presets for Layout

- 8 DVI In / 2 HDMI Out
- Resolution up to 2048 x 1080 (including 1080p)
- Multiple Labels per Video Windows - UMD, OMD, IMD, Standalone Labels
- Automatic Input Aspect Ratio Detection
- Built-in Video, Audio Alarm detection - no Audio, Audio High/Low, no Video, Video Black, Video Frozen
- Max 3Gbit/s HD Inputs
- Border Color & Size to change
- Remote Control (VZ Commander / API) & Internal Thermal Sensor
- Tally & Upto 16ch Audio Level Meters



MV series
MULTIVIEWER

Custom Screen Layout Presets & User-defined layout
Cost Effective Solution Inputs & Outputs
High Performance In Mission-Critical Installations

VIDEO WALL MOUNTS

Universal mounting solutions for a variety of installations

The ViewZ mount lineup includes various styles to accommodate most commercial installations for various video wall monitors. ViewZ video wall mounts are also designed for ease of installation and adjustment.



VZ-XMS

Video Wall Mounts
Display Range 43 ~ 65"

- Load Capacity 154 lbs / 70 kg
- Universal Mounting
- VESA 200 x 200 ~ 800 x 400 mm
- Vertical Tilting $-2^{\circ} \sim +4^{\circ}$
- Horizontal Tilting $\pm 3^{\circ}$
- Pop-out Extension
- Multi-monitor Stacking
- Open Design
- Custom Spacer
- X,Y & Z Axis Fine Tune Adjustment
- Anti-theft Design
- Straight Scissor-style Extension
- Compact Mounting Arms
- Quick Release Latch



VZ-AM03

Video Wall Mounts
Display Range 43 ~ 65"

- Load Capacity 143.3 lbs / 65 kg
- Universal Mounting
- VESA 200 x 200 ~ 600 x 400 mm
- Vertical Tilting -15° ~ +5°
- ±60° Swivel
- ±3° Level Adjustment
- Swiveling Arm(s): offer(s) maximum viewing flexibility (makes every seat the best seat)
- Leveling adjustments: allow monitor to be perfectly positioned after hanging



VZ-WM71

Video Wall Mounts
Display Range 43 ~ 65"

- Load Capacity 165 lbs / 70 kg
- Universal Mounting
- VESA 400 x 400 ~ 800 x 600 mm
- Vertical Tilting -10° ~ 0°
- Combining multiple mounts for quick accurate installation



VZ-FSM 2X2 / 3X2 / 3X3

Video Wall Mounts
Display Range 43 ~ 65"


- Load Capacity 110 lbs / 50 kg
- Universal Mounting
- VESA 100 x 100 ~ 600 x 400 mm
- Vertical Tilting -4° ~ +4°
- Multi-monitor Stacking
- Open Design
- Adjustable Mounting Brackets
- X,Y & Z Axis Fine Tune Adjustment



CUSTOM FABRICATED MOUNTS

Video Wall Mounts

- ViewZ custom fabrication shop was established to deliver custom video wall mounting solutions for challenging installations where standard mounting is not an option. ViewZ's custom fabrication shop can design and build custom wall mounting solutions from scratch, whether it's curved wall free standing mounts or wall mounts with wood cladding for elevated aesthetics



LED VIDEOWALL

Pixel by pixel calibration technology eliminates the difference in brightness & chromaticity within & between panels, improves the uniformity of display.





VZ-IFX

Indoor Fine Pixel LED Tile
Pixel Pitch 1.9/2.6/2.9/3.9/5.9 mm



SMD LED

- Brightness 800 nits
- Contrast Ratio - 5000:1
- 1:1 Aspect Ratio
- High Visual Uniformity
- Vivid Color Display (HDR Processing)
- Clearly Visible under Low Brightness
- Delicate & Smooth Video
- Higher Reliability - Optional Power & Data Redundancy
- GOB optional
- Panel Dimensions 19.68 x 19.68 x 2.75" (500 x 500 x 70 mm)
- Convenient Front/Rear Maintenance



VZ-IPX

Indoor Fine Pixel LED Tile
Pixel Pitch 1.2/1.5/1.8/2.5 mm



SMD LED

- Brightness 600 nits
- Color Temp. - 6500K to 9300K
- Contrast Ratio - 4000:1
- 16:9 Aspect Ratio
- High Visual Uniformity
- Vivid Color Display (HDR Processing)
- Delicate & Smooth Video
- Low failure rate & maintenance cost
- Simple and stylish appearance, easy to install
- Panel Dimensions 23.62 x 13.27 x 1.27" (600 x 337.5 x 32.3 mm)
- Convenient Front Maintenance




VZ-IPX-S

Indoor Fine Pixel LED Tile
Pixel Pitch 1.2/1.5/1.8/2.5 mm



SMD LED

- Brightness 600 nits
- Color Temp. - 5000K to 12000K
- Contrast Ratio - 10000:1
- 16:9 Aspect Ratio
- High Visual Uniformity
- Vivid Color Display (HDR Processing)
- Delicate & Smooth Video
- Low failure rate & maintenance cost
- Simple and stylish appearance, easy to install
- Panel Dimensions 23.62 x 13.28 x 1.08" (600 x 337.5 x 70 mm)
- Convenient Front Maintenance



VZ-IRX

Indoor Rental LED Tile
Pixel Pitch 1.9/2.6/2.9/3.9 mm



SMD LED

- Brightness 800 nits
- Contrast Ratio - 3000:1
- 1:1 Aspect Ratio
- High Visual Uniformity
- Vivid Color Display (HDR Processing)
- Clearly Visible under Low Brightness
- Delicate & Smooth Video
- Higher Reliability - Optional Power & Data Redundancy
- Curve Lock: -5° ~ +5° & -10° ~ +10°
- Creative Relocation Splicing
- Panel Dimensions 19.68 x 19.68 x 2.95" (500 x 500 x 75 mm)
- Convenient Front/Rear Maintenance



VZ-OFX28xxS series

Outdoor LED Tile
Pixel Pitch 2.5/3/4/5 mm



SMD LED

- Brightness 4500 ~ 5000 nits
- Contrast Ratio - 10000:1
- 1:1 Aspect Ratio
- High Visual Uniformity
- Vivid Color Display (HDR 10)
- High Refresh Rate, High Brightness & Non Glare
- Seamlessly splice images
- Low heat, excellent heat dissipation & no noise
- Panel Dimensions
12.6 x 6.3" (320 x 160 mm)
- Easy Rear Maintenance (IP65)



VZ-OFX26xxS series

Outdoor Fine Pitch LED Tile
Pixel Pitch 2.5/3/4/5 mm



SMD LED

- Brightness 4000 nits
- Color Temp. - 6500K to 8500K
- Contrast Ratio - 10000:1
- 1:1 Aspect Ratio
- High Visual Uniformity
- Vivid Color Display (HDR 10)
- High Refresh Rate, High Brightness & Non Glare
- Flexible Mounting Options
- Ultra-high Refresh Rate Output
- Seamlessly splice images
- Low failure rate & maintenance cost
- Panel Dimensions
12.6 x 6.3 x 0.63"
(320 x 160 x 16mm)
- Easy Front Maintenance (IP65)



VZ-OFX78xx series

Outdoor Fine Pixel LED Tile
Pixel Pitch 5.7/6.6/8/10 mm



SMD LED

- Brightness 6000 nits
- Color Temp. - 2000K to 9500K
- Contrast Ratio - 5000:1
- 1:1 Aspect Ratio
- High Visual Uniformity
- Vivid Color Display (HDR Processing)
- Clearly Visible under Low Brightness
- Matched Curve / Corner Installation
- Low Heat, Excellent Heat Dissipation & Low Noise
- Modular Quick Lock Design
- Panel Dimensions
18.9 x 12.6 x 0.7"
(480 x 320 x 19 mm)
- Easy Front/Rear Maintenance (IP65)



VZ-ORX series

Outdoor Rental LED Tile
Pixel Pitch 3.9/4.8 mm



SMD LED

- Brightness 4500 ~ 5000 nits
- Color Temp. - 2000K to 9500K
- Contrast Ratio - 5000:1
- 1:1 Aspect Ratio
- High Visual Uniformity
- Seamlessly Splice Images
- High Refresh Rate, High Brightness, Non Glare
- Slim & Light Die-Cast Cabinet
- Low heat, Excellent Heat Dissipation, no Noise
- Panel Dimensions
9.84 x 9.84" (250 x 250 mm)
- Easy Front/Rear Maintenance (IP65)



**RUGGED, BRIGHT
OUTDOOR LED**




VZ-SB50

Signal Sender Box
Max Input Resolution - 4096x4096



- HDMI 1.4 (1080p@60Hz) In / Out Loop through
- Control Area – 1.3M pixels
- Supports H.264 / H.265 4K @60 Hz
- 2 Sensors for Brightness, Temperature & Humidity
- EDID Management - Custom & Standard
- Synchronized playback between multiple devices possible (synchronization via NTP or GPS (4G module required))
- Stereo Audio Output
- 2 x Gigabit Ethernet ports
- 1 x Stereo audio connector

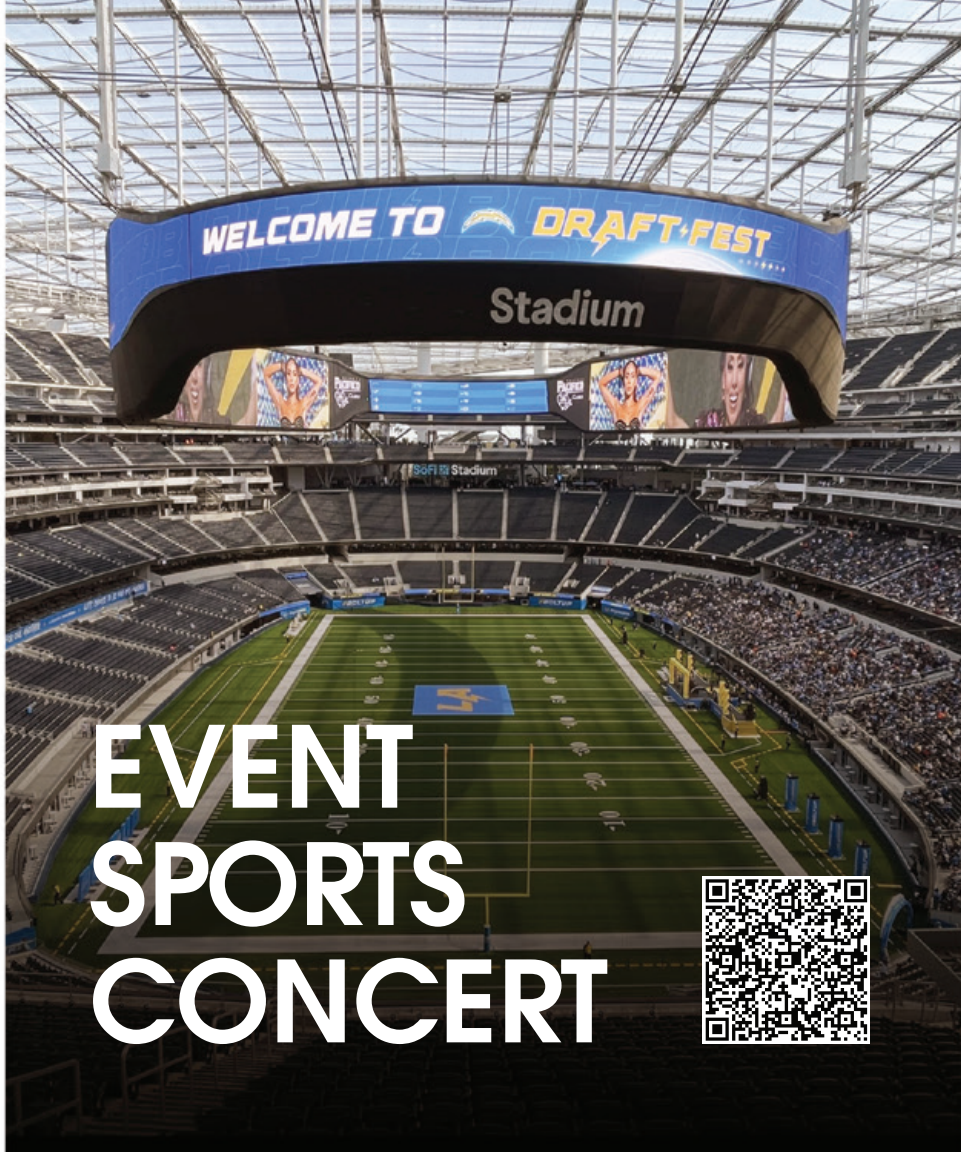

EVENT SPORTS CONCERT



VZ-SB165

Signal Sender Box
Max Input Resolution - 3840x2160



- 3G-SDI x2, HDMI 2.0 x1, SL-DVI x4 In
- Control Area – 10.4M pixels
- Supports HDCP 2.2 / EDID1.4
- 3 Independent Layers - 1 x (4K x 2K) Main Layers, 2 x (2K x 1K) PIP (PIP 1 & PIP 2), Adjustable Layer Priorities
- DVI Mosaic Overlay
- Full Screen & 10 User-Defined Presets
- Pixel to Pixel, Full Screen & Custom Scaling
- Decimal Frame Rate - 23.98 Hz, 29.97 Hz, 47.95 Hz, 59.94 Hz, 71.93 Hz and 119.88 Hz
- EDID Management - Custom & Standard



VZ-SB600

Signal Sender Box
Max Input Resolution - 1920x1200



- 3G-SDI / HDMI 1.3 / DVI & OPT (Loop-through)
- Control Area - 3.9M pixels (HDMI 1.3 / DVI / 3G-SDI + Loop, 10G OPT)
- Supports HDCP 1.4 / HDMI 1.3
- 3 Independent Layers - 1 x (4K x 2K) Main Layers, 2 x (2K x 1K) PIP (PIP 1 & PIP 2), Adjustable Layer Priorities
- Full Screen & 10 User-Defined Presets
- Pixel to Pixel, Full Screen & Custom Scaling
- All-Round Color Adjustment
- 3 Working Mode - Video Controller, Fiber Converter & Bypass
- Pixel Level Brightness & Chroma Calibration



VZ-SB700

Signal Sender Box
Max Input Resolution - 1920x1200



- SL-DVI / HDMI 1.3 (Loop-through) & Audio Inputs
- Control Area – 2.3M pixels
- Supports HDCP 1.4 / HDMI 1.3
- 8 bit - 1920 x 1200 @ 60Hz
- 12 bit - 1440 x 900 @ 60Hz
- RS232 In & Out Control Interfaces for Device Cascading
- UART In / Out - Control Ports for Cascading upto Max. 20 units
- Point to Point Brightness & Color Calibration
- Pixel Level Brightness & Chroma Calibration



VZ-SB1000


Signal Sender Box
Max Input Resolution - 1920x1200



- 3G-SDI / HDMI 1.3 / DVI & OPT (Loop-through)
- Control Area - 6.5M pixels (HDMI 1.4 / DVI / 3G-SDI + Loop, 10G OPT)
- Supports HDCP 1.4 / HDMI 1.3
- 3 Independent Layers - 1 x (4K x 1K) @ 60 Hz
- Full Screen & 10 User-Defined Presets
- Pixel to Pixel, Full Screen & Custom Scaling
- All-Round Color Adjustment
- 3 Working Mode - Video Controller, Fiber Converter & Bypass
- Pixel Level Brightness & Chroma Calibration

WALL MOUNTS

ViewZ offers a variety of wall mounts for monitors of all sizes ranging from simple flat wall mounts to swinging & articulating mounts. Also available is a spring-loaded scissor type video wall mount made for ViewZ video wall monitors.

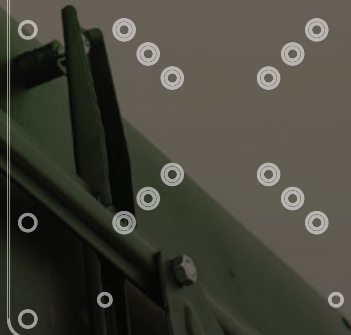

VZ-WM05

Wall Mounts
Display Range 10 ~ 27"

- Load Capacity 66 lbs / 30 kg
- VESA 75 x 75 ~ 100 x 100 mm
- Low Profile: 0.59" / 15 mm



VZ-WM11

Wall Mounts
Display Range 10 ~ 27"

- Load Capacity 66 lbs / 30 kg
- VESA 50 x 50 ~ 100 x 100 mm
- Vertical Tilting $\pm 20^\circ$
- $\pm 30^\circ$ Swivel





VZ-AM02-A

Wall Mounts
Display Range 10 ~ 27"

- Load Capacity 66 lbs / 30 kg
- VESA 50 x 50 ~ 100 x 100 mm
- Vertical Tilting $\pm 20^\circ$
- $\pm 30^\circ$ Swivel



VZ-AP200

Wall Mount Adapter
Display Range 23 ~ 32"

- Load Capacity 66 lbs / 30 kg
- VESA 50 x 50 ~ 200 x 200 mm
- VESA Adapter



VZ-WM50

Wall Mounts
Display Range 27 ~ 43"

- Load Capacity 165 lbs / 75 kg
- Universal Mounting
- VESA 50 x 50 ~ 400 x 400 mm
- Vertical Tilting $-8^\circ \sim 0^\circ$
- Profile 1.45" / 37 mm



VZ-RMK08

Wall Mounts
Display Range 10 ~ 21.5"

- Load Capacity 20.4 lbs / 9.25 kg
- Universal Mounting
- VESA 75 x 75, 100 x 100 mm
- 5U Rack Mounting
- Tilting $\pm 35^\circ$
- Extension
1.45 ~ 3.14" (37 ~ 80 mm)



VZ-WM02

Wall Mounts
For Square Pole

- **Display Range 10 ~ 19"**
- Load Capacity
22 lbs / 10 kg
- Universal Mounting
- VESA 75 x 75 mm
- Tilting $\pm 90^\circ$
- 360° Swivel
- $\pm 90^\circ$ Pivot (PAN)
- 12.67" / 322 mm
Depth Profile



VZ-SM01

Gondola Mounts
For Square Pole

- **Display Range 10 ~ 19"**
- Load Capacity
5 lbs / 2.3 kg
- VESA 75 x 75, 100 x 100 mm
- Tilting $-35^\circ \sim +35^\circ$
- 180° Swivel
- 12.9 ~ 18.9" Depth Profile



VZ-SCM-S

Self Check-out Mounts
For Round Pole

- **Display Range 10 ~ 19"**
- Load Capacity
22 lbs / 10 kg
- VESA 75 x 75, 100 x 100 mm
- $\pm 90^\circ$ Tilt Up & Down
- $\pm 90^\circ$ PAN
- 360° Swivel
- Mounting Pole Size
1.25 (32) ~ 2.5" (64 mm)



VZ-SCM

Self Check-out Mounts
For Round Pole

- **Display Range 10 ~ 19"**
- Load Capacity
33 lbs / 15 kg
- VESA 75 x 75 mm
- $\pm 90^\circ$ Tilt Up & Down
- $\pm 90^\circ$ PAN
- 360° Swivel
- Depth Profile 3.22 ~ 15.41"
(82 ~ 392 mm)
- Mounting Pole Size
1.25 (32) ~ 2.5" (64 mm)



VZ-SCM-SQ

Self Check-out Mounts
For Square Pole


- **Display Range 10 ~ 19"**
- Load Capacity
44 lbs / 20 kg
- VESA 75 x 75, 100 x 100 mm
- $\pm 90^\circ$ Tilt Up & Down
- $\pm 90^\circ$ PAN
- 360° Swivel
- Depth Profile 3.22 ~ 15.41"
(82 ~ 392 mm)
- Mounting Pole Size
1 (25.4) ~ 2" (50.8 mm)





CEILING MOUNTS


Ceiling mounts tilt and swivel in all directions for multiple viewing angle



VZ-CM308

Telescopic Ceiling Mounts
Display Range 17 ~ 43"

COLOR
Options



VZ-CM-EB/EW

Telescopic Ceiling Mounts
Extension Pole Set

COLOR
Options



- Load Capacity 66.1 lbs / 30 kg
- VESA 50 x 50 ~ 200 x 200 mm
- Vertical Tilting -5° ~ +45°
- 360° PAN Rotation
- Installation Range 3 to 5.25 ~ 8 ft (0.94 to 1.57 ~ 2.45 m)
- Installation Range with CM-EW/EB 3 to 5.25 ~ 18 ft (0.94 to 1.57 ~ 5.48 m)
- **Designed specifically for VZ-CM308-W/B**
- Adjustment for installations ranging from 3 ft to 5.2 ft
- VZ-CM-EB Extension Pole is available up to 10 ft (2 sets)



TILT PAN SWIVEL MOUNTS



VZ-CMKit-01

Telescopic Ceiling Mounts
Display Range 23 ~ 43"


- Load Capacity 110 lbs / 50 kg
- VESA 75 x 75 ~ 200 x 200 mm
- Vertical Mount Head Tilting
-12° ~ +5°
- Horizontal Mount Head Tilting ±5°
- Truss Tilting ±80°
- 360° PAN Rotation
- Standard Thread - 1.5"



VZ-CMKit-02

Telescopic Ceiling Mounts
Display Range 23 ~ 43"

- Load Capacity 110 lbs / 50 kg
- VESA 75 x 75 ~ 200 x 200 mm
- Vertical Mount Head Tilting
-12° ~ +5°
- Horizontal Mount Head Tilting ±5°
- Truss Tilting ±80°
- 360° PAN Rotation
- Standard Thread - 1.5"
- Pole Length - 35.43" (900 mm)



VZ-CMKit-06

Dual Telescopic Ceiling Mounts
Display Range 23 ~ 43"


- Load Capacity 110 lbs / 50 kg
(for each head)
- VESA 75 x 75 ~ 200 x 200 mm
- Vertical Mount Head Tilting
-12° ~ +5°
- Horizontal Mount Head Tilting ±5°
- Truss Tilting ±80°
- 360° PAN Rotation
- Standard Thread - 1.5"
- Pole Length - 35.43" (900 mm)



VZ-CMKiT-04

Telescopic Ceiling Mounts
Display Range 43 ~ 65"

- Load Capacity 110 lbs / 50 kg
- Universal Mounting
- VESA 200 x 200 ~ 800 x 400 mm
- Vertical Mount Head Tilting -12° ~ +5°
- Horizontal Mount Head Tilting ±5°
- Truss Tilting ±80°
- 360° PAN Rotation
- Standard Thread - 1.5"
- Pole Length - 35.43" (900 mm)



VZ-CMKiT-07


Dual Telescopic Ceiling Mounts
Display Range 43 ~ 65"

- Load Capacity 110 lbs / 50 kg (for each head)
- Universal Mounting
- VESA 200 x 200 ~ 800 x 400 mm
- Vertical Mount Head Tilting -12° ~ +5°
- Horizontal Mount Head Tilting ±5°
- Truss Tilting ±80°
- 360° PAN Rotation
- Standard Thread - 1.5"
- Pole Length - 35.43" (900 mm)



DUAL CEILING MOUNTS

ACCESSORIES

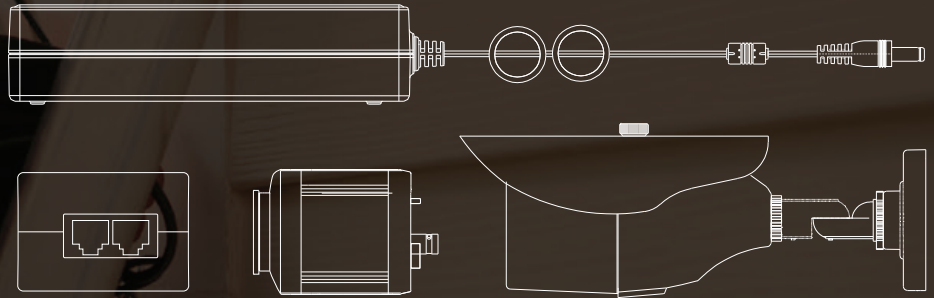



VZ-DC24-320

AC/DC Power Converter
UL/US Listed

- **AC Input** - 88~264V AC (124 ~ 370V DC), 47~63Hz
- **DC Output** - 24V DC/320 W
- Built-in Active PFC Function
- Power Factor > 0.95
- A Low Profile Enclosed Power Supply with PFC Function
- Over Voltage / Overload / Over current / Short-Circuit Protection
- 30mm Low Profile Design for 1U Installation
- Conformal Coating and Green LED per Output



VZ-PSU2N-24/PSU3N-24/PSU4N-24

24V AC/DC Power Converter
EMI: CE, FCC/cUL, CCC, PSE

- **AC Input** - 100~240 V AC (50/60 Hz)
- **DC Output** -
24V DC - 2.0A/48 W (VZ-PSU2N-24),
24V DC - 2.7A/64.8 W (VZ-PSU3N-24),
24V DC - 4.2A/100.8 W (VZ-PSU4N-24)
- Energy Efficiency Rating: VI
- Wide Voltage Compatibility
- Compact & Lightweight
- Safe & Reliable
- Over Voltage / Overload / Over current / Short-Circuit Protection
- Safety : UL, KCC, CCC, TUV/GS, PSE, C-Tick



VZ-CSE1202

50V DC Out / 25W PoE Injector
EMI: FCC Class B

- **Compatible with 10" IP-PVM**
- AC IN : 110~240V AC @50/60Hz, 0.5A
- Output power - 50V $\overline{\text{---}}$ 25W
- Standard, IEEE 802.3 af
- Supports 10/100/1000 Base-T
- Internal AC/DC Converter
- Passive Plug & Play
- Compact design fits easily in WLAN access point and IP cameras installations
- Compact & Light-weight
- Safety : UL Listed E353601





VZ-VBC-1

AHD/TVI/CVI/CVBS (BNC)
30IR LEDs, ATW/MWB, 3D DNR, WDR



VZ-BCHS-1

3G/HD-SDI/HDMI/CVBS (BNC)
ATW, WDR, DNR, BLC, AGC



VZ-FBS-2

3G/HD-SDI/CVBS (BNC)
ATW, WDR, DNR, HLC, BLC, AGC



VZ-FMS-2

3G/HD-SDI/HDMI/CVBS (BNC)
ATW, WDR, DNR, HLC, BLC, AGC

- **1080p Full HD VARI-FOCAL Bullet Weather-proof IR Camera**
- Full HD 1080p over coaxial cable, BNC connection
- 1/2.8" SONY Progressive Scan CMOS Sensor
- 2.1 MP Vari-Focal 2.8-12 mm HD Lens
- 1080p / NTSC : 30fps & PAL : 25fps
- Minimum Illumination 0.0001 Lux (F1.2)
- Aluminum Alloy Body / IP66
- Video Transmission 300m

- **Compact HD-SDI/HDMI Full HD Box Camera**
- Full HD 1080p over coaxial cable, BNC connection
- 1/3" 2.1MP Progressive Scan CMOS Sensor
- 2.1 MP Vari-Focal 2.8-12 mm HD Lens
- 1080p / NTSC : 30fps & PAL : 25fps
- Minimum Illumination 0.0001 Lux (F1.2)
- Privacy, Motion, Shutter Speed
- Digital Zoom, Gamma, Mirror
- Flip, Defog, Color Bar Signal

- **2.1M 3G/HD-SDI Full HD Miniature Camera**
- Full HD 1080p over coaxial cable, BNC connection
- 1/3" 2.1MP Progressive Scan CMOS Sensor
- Minimum Illumination 0.1 Lux (F1.2)
- Privacy, Motion, Shutter Speed
- Digital Zoom, Mirror, Flip
- Color Bar Signal

- **2.1M 3G/HD-SDI Full HD Miniature Box Camera**
- Full HD 1080p over coaxial cable, BNC connection
- 1/3" 2.1MP Progressive Scan CMOS Sensor
- Minimum Illumination 0.1 Lux (F1.2)
- ACE, Mirror, Flip, Shutter Speed
- Privacy, Motion, Digital Zoom
- Color Bar Signal

PRODUCT APPLICATIONS

CMP, RTN, RTC



- Commercial Global Accounts
- Federal / State Government
- Retail & Distribution

CGM



- Data Centers
- Commercial Global Accounts
- K-12 / Higher Education

IPM



- Healthcare
- Financial
- Transportation

PVM




- Retail
- K-12 / Higher Education
- Healthcare

VIDEO WALL



- Data Centers
- Federal / State Government
- Transportation

Interactive 4K Displays

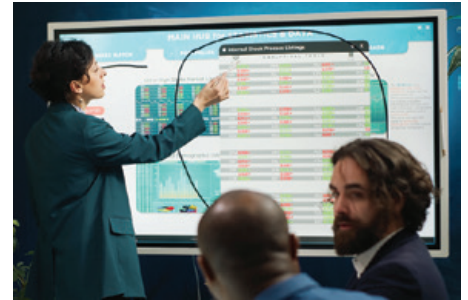

- K-12 / Higher Education
- Commercial Offices
- Hospitality

ViewZ

1030 N. ARMANDO ST.
ANAHEIM, CA 92806



Sales

- ✉ sales@viewzusa.com
- 📞 1-714-996-1177
- 📠 1-714-996-1138
- 📞 1-888-99-ViewZ
- 🕒 Monday-Friday 7AM - 5PM

ViewZ monitors are built with commercial grade "A" panels that have superior color reproduction and much higher reliability. Built to run 24/7, ViewZ monitors are made to last and backed with 3 year factory warranty.

Technical Support

- ✉ techsupport@viewzusa.com
- 📞 1-714-996-1177
- 🕒 Monday-Friday 8AM - 5PM

For the latest information about **ViewZ Solution, please visit:**

Professional Security Solution Website:
<https://viewzusa.com/security/>