


VZ-WM50

WALL MOUNT FOR 27" to 32"

VZ-WM50 INSTALLATION INSTRUCTIONS

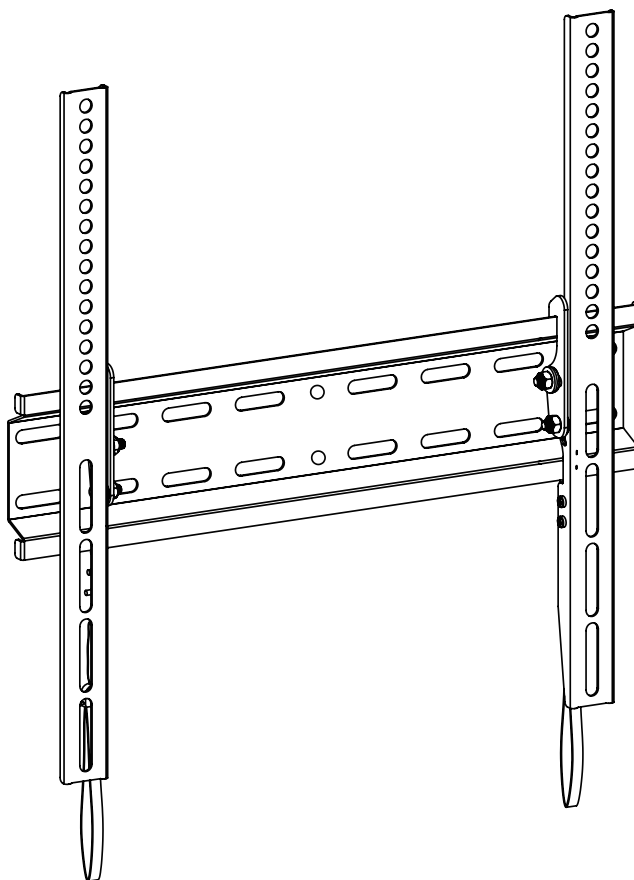


ViewZ®
www.viewzusa.com



VESA Standard Mounting Hole

400 x 400, 400 x 300,
300 x 300, 300 x 200,
200 x 200, 200 x 100,
100 x 100, 100 x 75,
75 x 75 mm



55" MAX



MAX WEIGHT 115 lbs / 52 kg



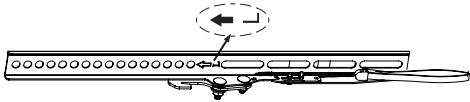











Weight Limit

Maximum Flat-panel Weight: **115 lbs**

THE WALL STRUCTURE MUST BE CAPABLE OF SUPPORTING AT LEAST FIVE TIMES THE WEIGHT OF THE FLAT-PANEL. IF NOT, THE WALL STRUCTURE MUST BE REINFORCED.

Parts

Your ViewZ mount product is shipped with all proper installation hardware and components. If there are parts missing and/or damaged, please stop the installation and contact ViewZ USA at (888)-998-4399.

1		x 1	2		x 1
	Wall Plate			Bracket Right	
3		x 1	B		x 4
	Bracket Left			M6 x 15 mm	
A		x 4	C		x 4
	M4 x 30 mm			M6 x 30 mm	
D		x 4	E		x 4
	M8 x 15 mm			M8 x 45 mm	
F		x 4	G		x 4
	Lag Bolt ST 8 x 65 mm			3 Hole Spacer	
H		x 4	I		x 8
	Spacer L10 mm			Spacer L5 mm	
J		x 4	O		x 4
	Washer Ø 8 mm			Wall Anchor	

Safety

WARNING ! SEVERE PERSONAL INJURY AND PROPERTY DAMAGE CAN BE RESULTED FROM IMPROPER INSTALLATION OR ASSEMBLY. READ THE FOLLOWING WARNINGS BEFORE INSTALLATION.

If you do not understand the instruction or have any concern or question, please contact to the qualified installer or seller. Do not install or assemble if the product or hardware is damaged or missing. Not all parts and hardware included must be used. If you require replacement parts, please contact customer service at **rma@viewzusa.com** or **714-996-1177**.

This product has been designed for using a vertical wall - constructed of wood studs. Wood studs defined as a wall consisting of a minimum of 2x4 studs with a maximum 16 stud spacing with a maximum 1/2 of wall covering - drywall, lath or plaster. For custom installation, please contact or consult with a qualified installer. This product may contain moving parts and please use with caution. Please check **viewzusa.com** for more products and company information.

**Cleaning and Maintenance****Cleaning**

- To clean, wipe with a soft & slightly moist cloth
- Never use corrosive detergents, wire brush, abrasive scourer, metal or sharp utensil to clean the product surface.

Maintenance

- Check the components regularly to make sure all screws and bolts are tightened.
- Store in a cool and dry place away from children and pets. Ideal in original packaging.
- Avoid any vibration and shock.

**Mounting Safety**

Two people are recommended to install the mount.












Parts

This product includes small items that could cause a choking hazard if swallowed. Before starting assembly, verify all parts are included and undamaged. If any part is missing or damaged, please contact: **rma@viewzusa.com** or **714-996-1177**.

Note - Not all parts and hardware (included) will be used.





Installation Tools

 Electronic Stud Finder	 Pencil	 Protective Eye-wear	 Portable Drill	 7/32 inch (5.5 mm) Wood Drill Bit	 3/8 inch (10 mm) Concrete Drill Bit
 Level	 1/2" Socket	 Phillips Head Screwdriver	 1.2 in (12.7 mm) Socket Wrench	 Tape Measure	 Hammer

Installation - Select Monitor Screw Diameter & Length


Step 1

Thread screws by hand into the threaded holes on the back of your monitor to select which screw diameter fit into your monitor.

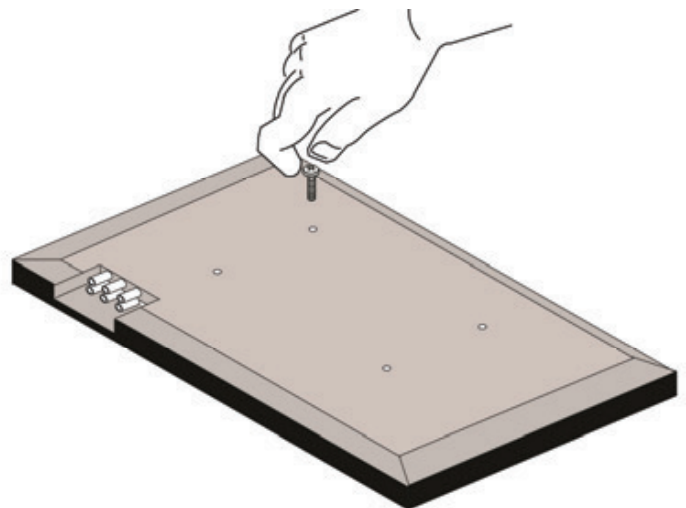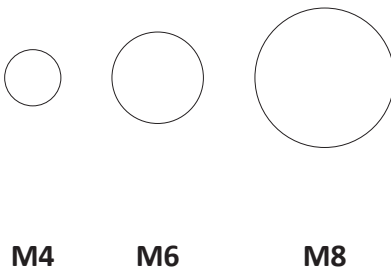

Step 2

When attaching brackets to the flat screen, be careful about over-tightening screws and be sure about breaking bottom out of the mounting holes.

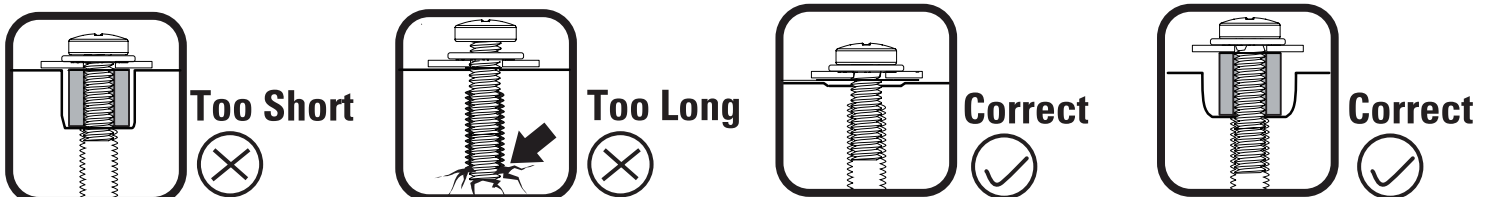


Installation - Attach the Monitor Bracket


Step 3

Position your monitor bracket configuration (A or B) over your monitor hole pattern - making sure the bracket is centered over the TV hole pattern and level. Secure the bracket and use screw/washer (A-Flat Back) or space/screw/washer (B-Round Back / Extra Space) selection.

A. Flat Back

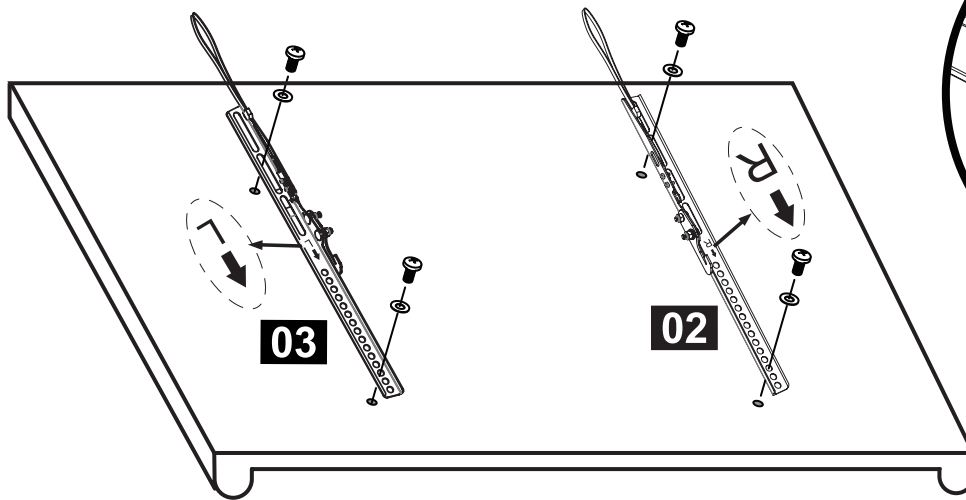

B. Round Back / Extra Space

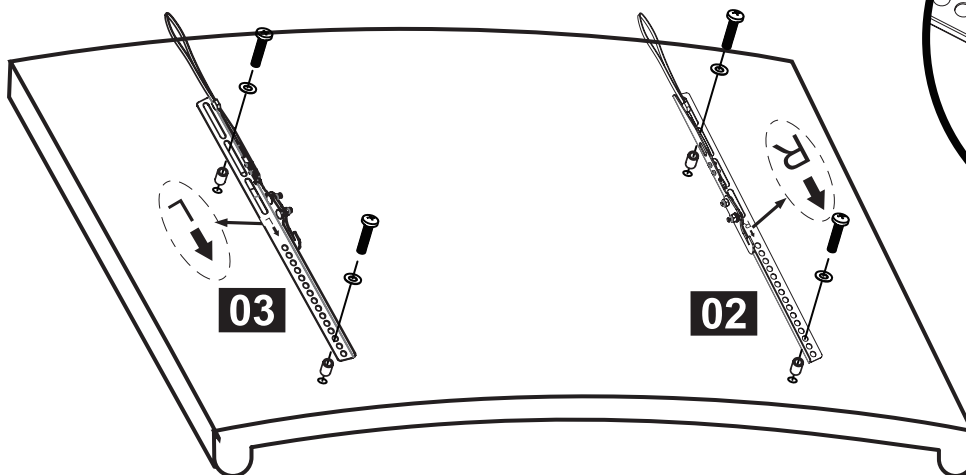


Mounting Safety


Two people are recommended to install the mount. Ensure monitor bracket is securely fastened before moving onto the next step.

Installation - Wall Plate Installation (Concrete or Brick Wall)


Step 4

-  **Caution**
- To avoid potential personal injury or property damage;
- All lag bolts (F) must be firmly tightened to prevent unwanted movement of the wall palte (1).
 - Ensure the wall plate is securely fastened to the wall before continuing to the next step.


2A-1

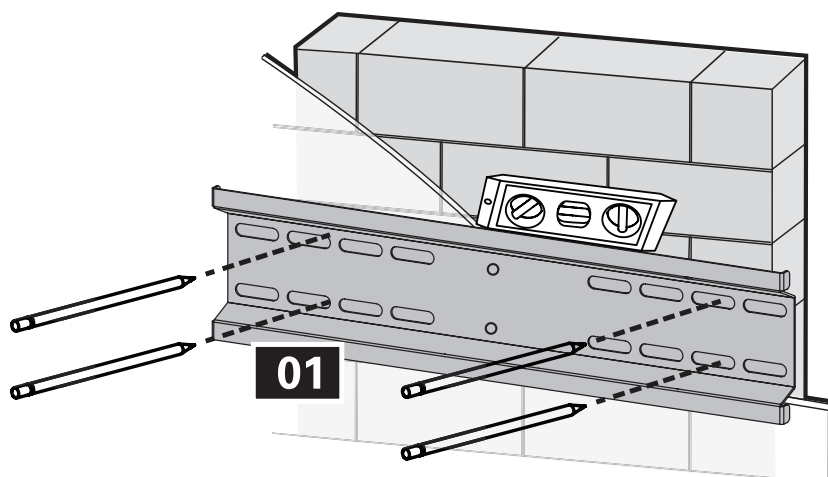

2A-2

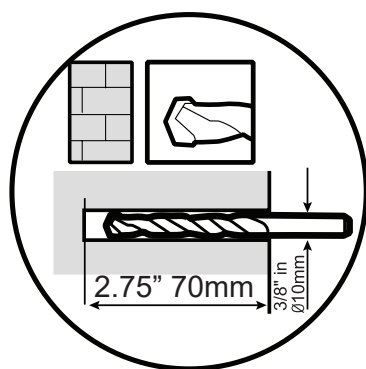


Drill pilot holes.

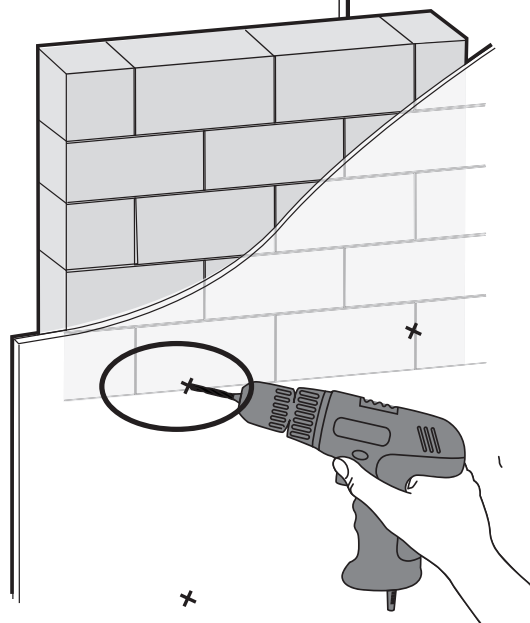


Installation - Wall Plate Installation (Concrete or Brick Wall)

Step 4

-  **Caution**
- To avoid potential personal injury or property damage;
- All lag bolts (F) must be firmly tightened to prevent unwanted movement of the wall palte (1).
 - Ensure the wall plate is securely fastened to the wall before continuing to the next step.

2A-3

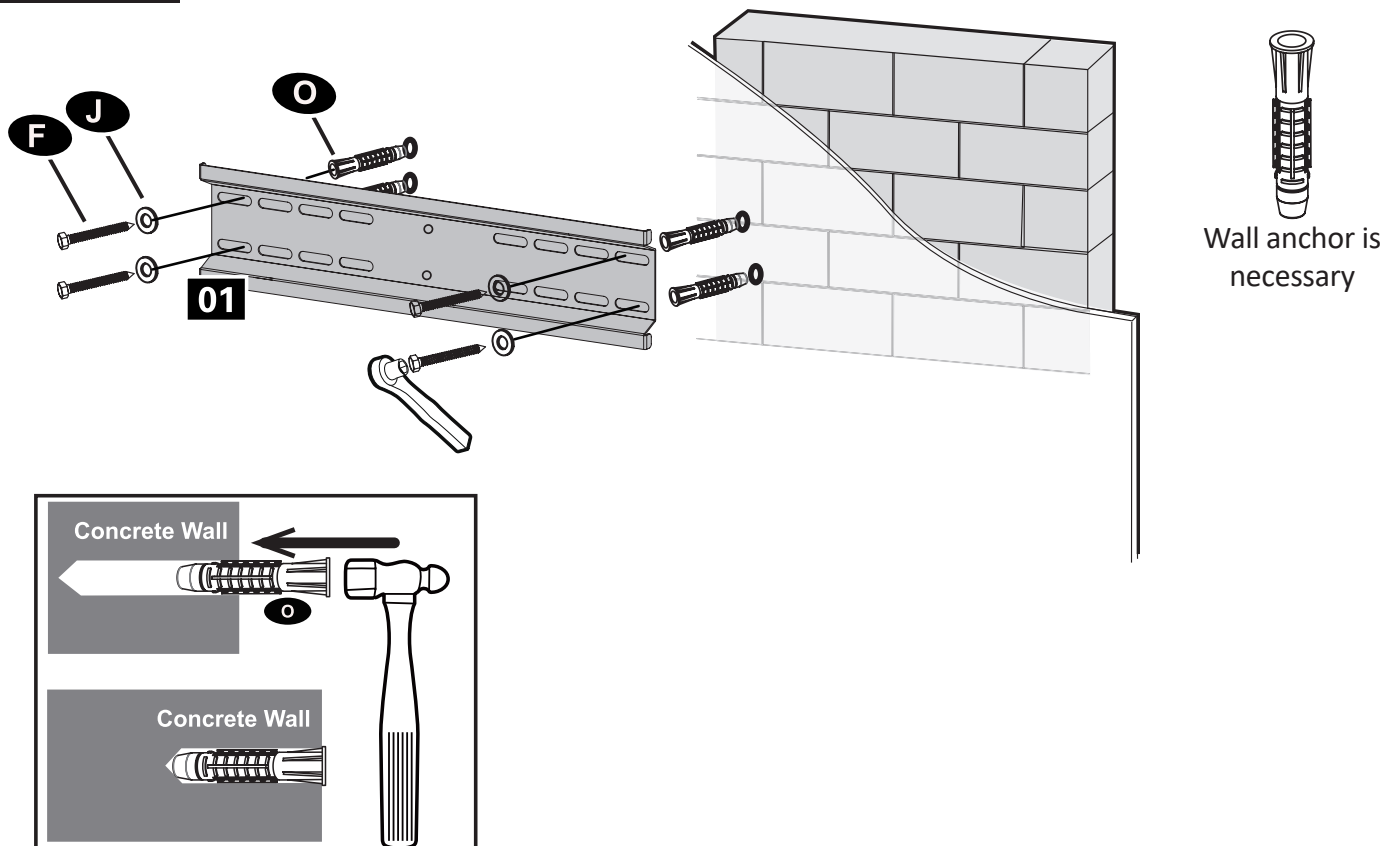

Install wall plate (1) using lag bolts (F) and washer (J) and anchor (O). Tighten the lag bolts (F) until they are pulled firmly against the wall palte (1).

Installation - Wall Plate Installation (Wood stud)

Step 4




Caution

To avoid potential personal injury or property damage;

- Drywall covering the wall must not exceed 5/8 inch (16 mm).
- Minimum wood stud should have common 2 x 4 inch (51 x 102 mm) over minimum 1-1/2 x 3-1/2 inch (38 x 89 mm)


2B-1

Position the stud. Verify & mark the center of stud by finding the stud edges using an awl, thin-nail or edge-to-edge stud finder.

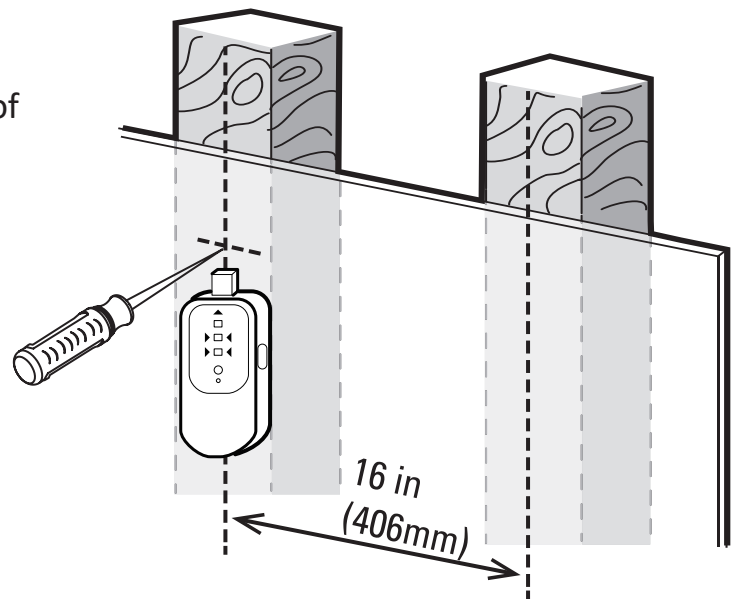

2B-2

- Position the wall plate at your desired height and line-up the holes with your stud center line.
- Level the wall plate and mark the holes

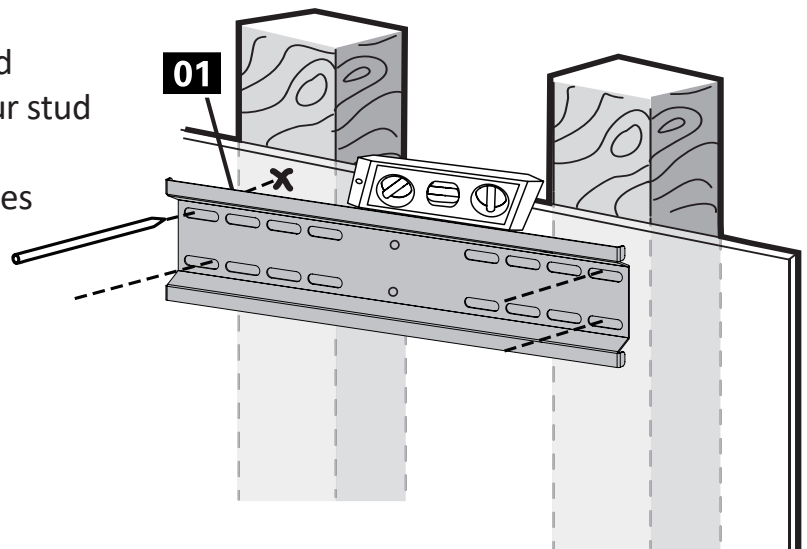

Installation - Wall Plate Installation (Wood stud)

Step 4




Caution

To avoid potential personal injury or property damage;

- Drywall covering the wall must not exceed 5/8 inch (16 mm).
- Minimum wood stud should have common 2 x 4 inch (51 x 102 mm) over minimum 1-1/2 x 3-1/2 inch (38 x 89 mm)

2B-3

Drill pilot holes using a 7/32 inch (5.5 mm) diameter drill bit

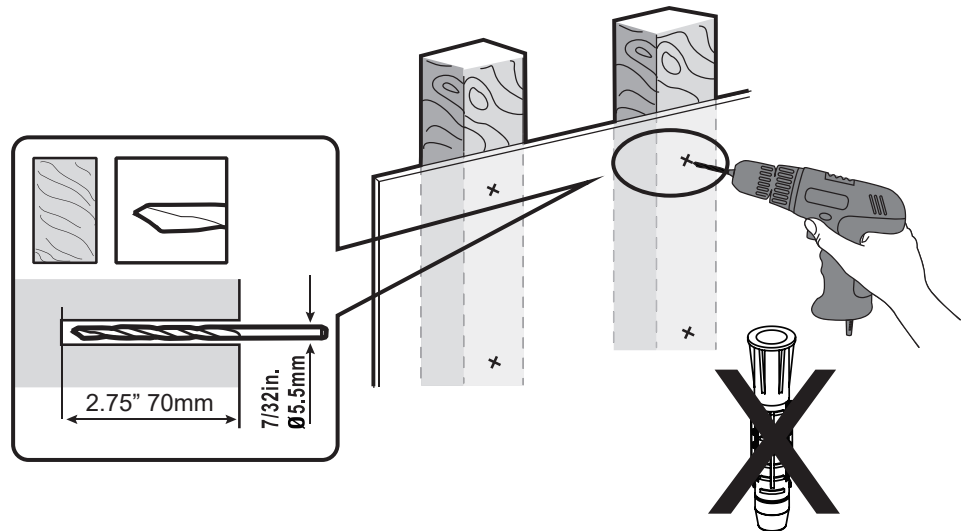


Important !

Pilot holes must be drilled to a depth of 2-3/4 inch (70 mm).
Be sure to drill into the center of the stud.


2B-4

- Install the wall plate assembly using lag bolts (F) and washer (J).
- Tighten the lag bolts (F) only until it is against the wall plate.


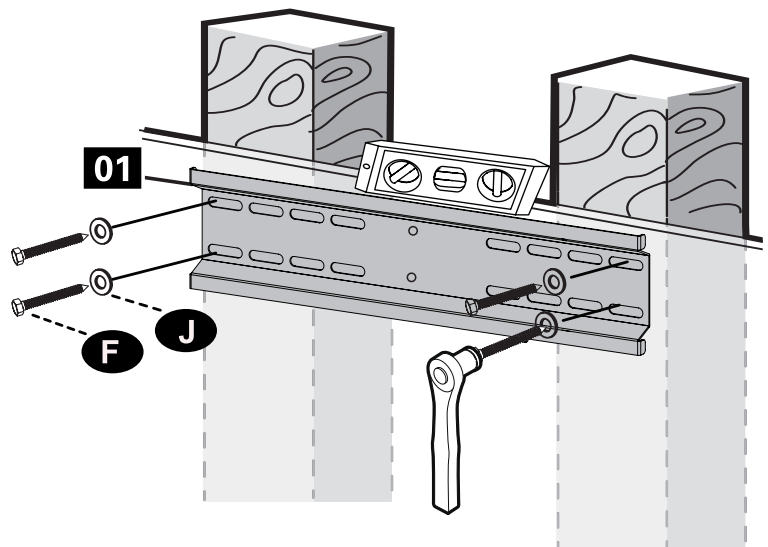


Installation - Tighten

Step 5

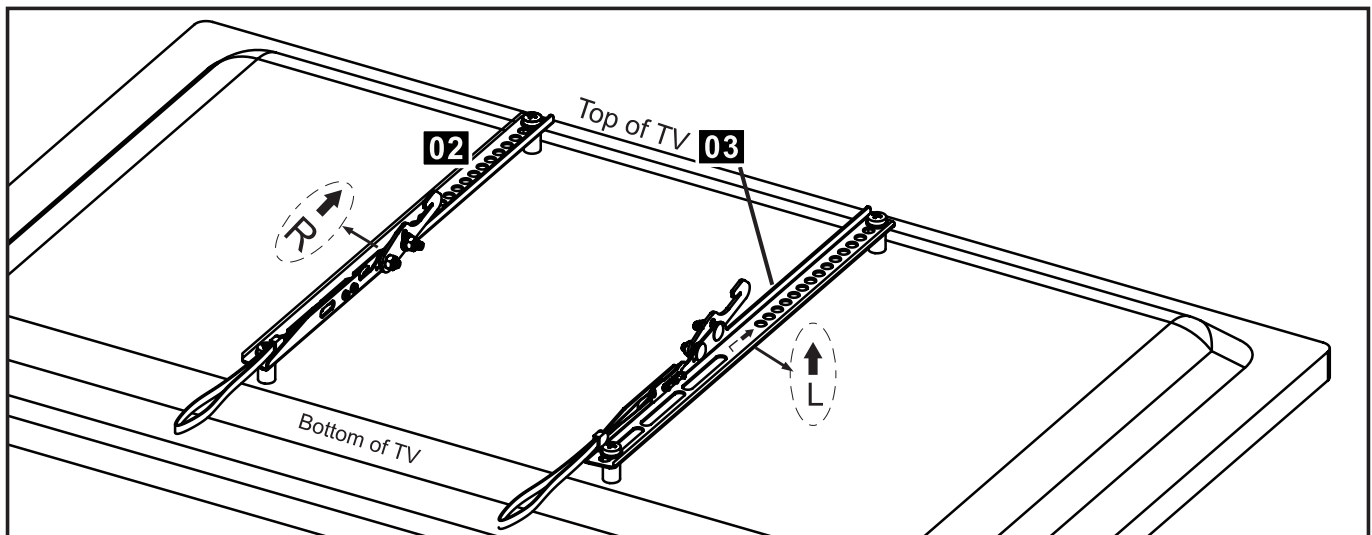


Please adjust the tilting angle with the Allen wrench for both (2) and (3) as the pictures show before hanging monitor.

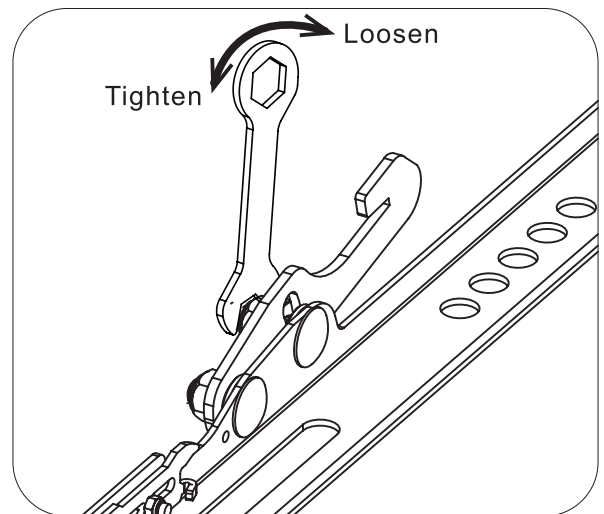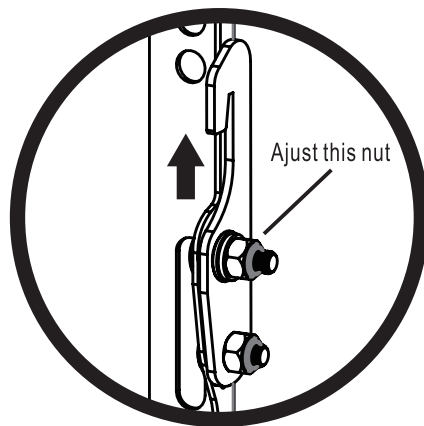


Installation - Hang & Secure the Monitor

Step 6

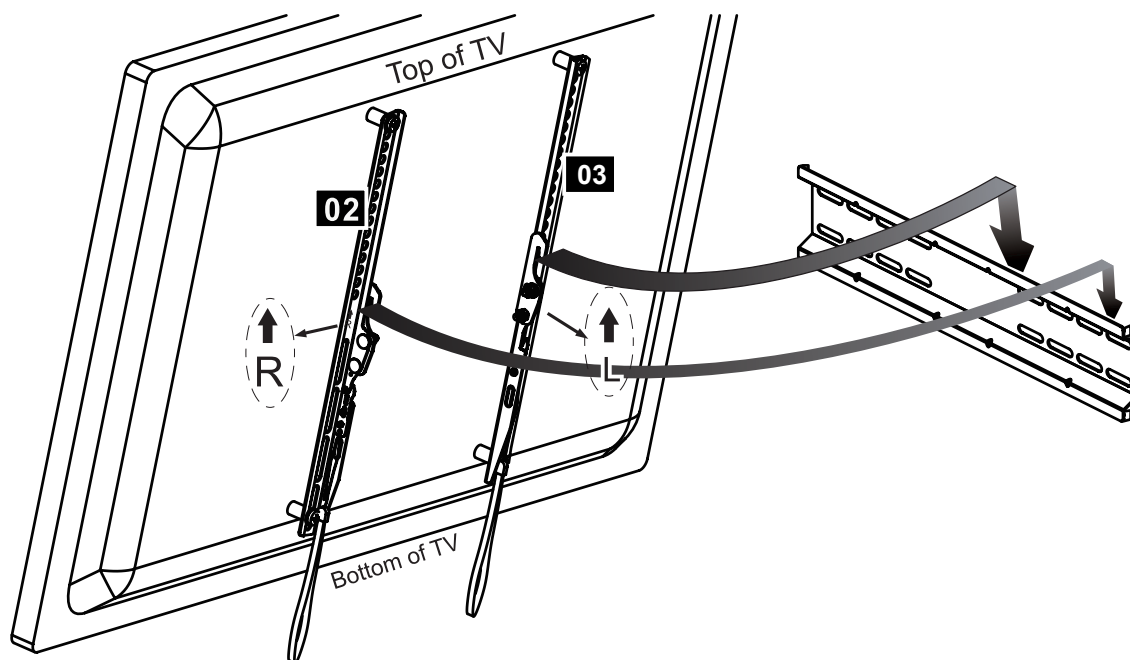

Step 7

- Pull the strap down and push the monitor to secure the monitor brackets (2) and (3) to the wall plate (1).
- If cannot tilt the monitor, please take the monitor off and then adjust the tilt as STEP 5 shows.

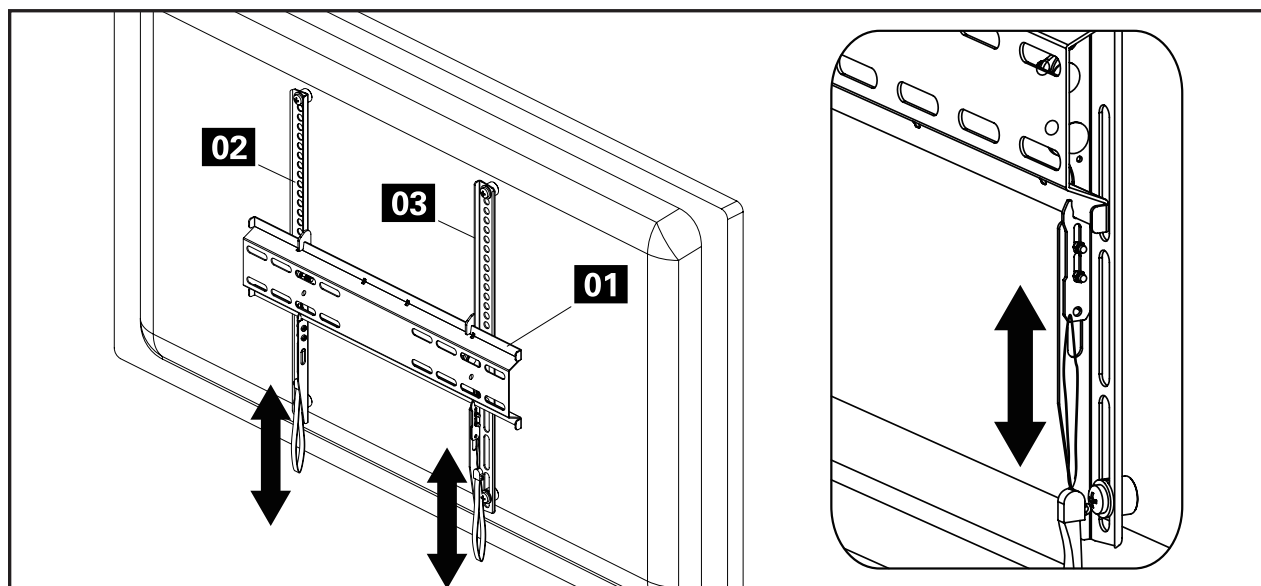

Disclaimer

ViewZ USA intends to make this manual accurate and complete. However, ViewZ USA makes no claim that the information contained herein covers all details, conditions or variations, nor does it provide for every possible contingency in connection with the installation or use of this product. The information contained in this document is subject to change without notice or obligation of any kind. ViewZ USA makes no representation of warranty, expressed or implied, regarding the information contained herein. ViewZ USA assumes no responsibility for accuracy, completeness or sufficiency of the information contained in this document.

Contact Us

NORTH AMERICA

177 W. Orangethorpe Ave.

Placentia, CA 92870

USA and Canada

Phone: 1-888-998-4399

Fax: 1-714-996-1138

Other Locations

Phone: (001) 888-998-4399

Fax: (001) 714-996-1138