

VZ-75IBX-T

INTERACTIVE LARGE 4K MONITOR



VZ-75IBX-T ADVANTAGES

- 75" 4K UHD LED Panel
- Supports 4K (3840X2160) Resolution
- Supports **Screen Sharing Software**
- Supports **Play Store** (Google)
- Supports **Zoom Meeting & Microsoft Teams**
- Supports **Touch Screen & Conference System** (Built-in Camera, Mic)
- Supports OPS (Option)
- **20-Point Touch** Interactive Panel
- Wide Viewing Angle (IPS Panel), Universal Wall Mounting




MODEL #	VZ-75IBX-T	
FEATURES		
Screen Size	75"	
Max. Resolution	3840 x 2160 @60Hz	
Pixel Pitch	0.4296 mm x 0.4296 mm	
Brightness	350cd/m ² (Typical)	
Contrast Ratio	1200:1	
Aspect Ratio	16 : 9	
Viewing Angle (H/V)	178° / 178°	
Display Color	1.07G (10bit)	
Response Time	< 8 ms	
INTERFACE		
HDMI (2.0) In / Out	3 / 1	
DP In / VGA In	1 / 1	
RJ45 In / RS232 (DB 9) In	2 / 1	
USB Type-C In	2	
USB 3.0 (Type-A) In	4	
USB 2.0 (Type-A) In / USB 2.0 (Type-B) In	1 / 1	
Touch (USB 2.0, Type B)	1	
Earphone (Line Out)	1	
PC Audio In	1	
CAMERA & MIC		
Camera Type	1 (2MP)	
Image Sensor	1 / 3"	
Focal Length	2.1 mm	
Microphone	6-Groups	
SPECIAL FEATURES		
Image Retention	YES	
Touch	Sensor Type	Non-contact infrared sensing technology
	Infrared Touch	20 Points
	Surface Protection	4mm - physical tempered Mohs level 7
	Glass Transmittance	> 88%
	Touch Depth	3±0.5mm
	Touch Accuracy	≤ 1 mm
	Input Mode	Opaque object (Finger, Pen, etc)
	Theoretical Hit	Same position 60 million times above
	Power Supply	USB (USB power supply)
	Supply Voltage	DC 5.0±5%
	Frame Material	Aluminum alloy frame, PCBA
	Light Resistance	Incandescent lamp (220V, 100W)
USB Media Player	Video Codec	MPEG1/2, MPEG4, DivX 3.11/4.12/5.x/5, XviD, H.263, H.264, MVC, AVS, WMV3, VC1, Motion JPEG, VP8/9, RV30/40
	Video Format	MPEG, AVI, MOV, MP4, MKV, RM, 3GP, FLV, WebM, ASP
	Image Format	JPEG, PNG, BMP
	Music Format	mp3, mp4, wma

AUDIO		
Built in speaker	12W X 2	
REFRESH RATE		
HDMI (2.0) In	3840 x 2160 @ 60Hz	
DP In	3840 x 2160 @ 60Hz	
VGA In	1920 x 1080 @ 60Hz	
DIMENSIONS & WEIGHT		
Outline Dimension (W x H x D)	67.21 x 39.87 x 3.62"	
	1707.16 x 1012.73 x 92 mm	
Net Weight / Gross Weight	114.64 lbs (52.0 kg) / 145.5 lbs (66.0 kg)	
MOUNT		
VESA	600 mm x 400 mm (M8)	
ANDROID BOARD SPEC		
Android OS	Ver 11.0	
Processor - CPU / Core	A55 / 4 Cores	
Processor - GPU	G52 x 2	
Processor - Frequency	1.9 GHz	
RAM	4GB DDR4 / 32GB eMMC	
Chip Solution	Amlogic	
WiFi	2.4G / 5G	
Bluetooth	Ver 5.0	
OPS (OPTION)		
CPU	Intel® Core™ i7-8750H - 4 Core & 8 Threads 2.2 G Hz	
MEMORY	8GB DDR4 RAM 2400 / 2666M Hz	
Hard Disk	SSD 128G (256G / 512G Optional)	
OS	Windows 11	
HDMI Out	1	
DP Out	1	
USB 2.0 / USB 3.0 / USB (Type-C) In	2 / 4 / 1	
RJ-45 (Ethernet) In / Mic In / Line Out	1 / 1 / 1	
Power Supply	60W (12V - 19V, 4A)	
GENERAL		
Transmitter - IR Remote Control	YES	
Housing	Aluminium Allo Frame / Sheet Metal Back Cover	
Power	Electrical Ratings	AC 100-240V, 50/60Hz
	Consumption	≤ 350 W / ≤ 0.5 W (Standby)
Operating Temperature	32 ~ 104°F / 0 ~ 40°C	
Storage Temperature	-4 ~ 140°F / -20 ~ 60°C	
Operating Humidity	10 ~ 90% RH	
Regulations	FCC(A), CE, NDA A, RoHS	
Language (OSD)	English	
Accessories	Manual x1, Power Cable x1, Touch Pen x1, Remote Controller x1, Wall Mount x1	

VZ-75IBX-T


INTERACTIVE LARGE 4K MONITOR

DIMENSION

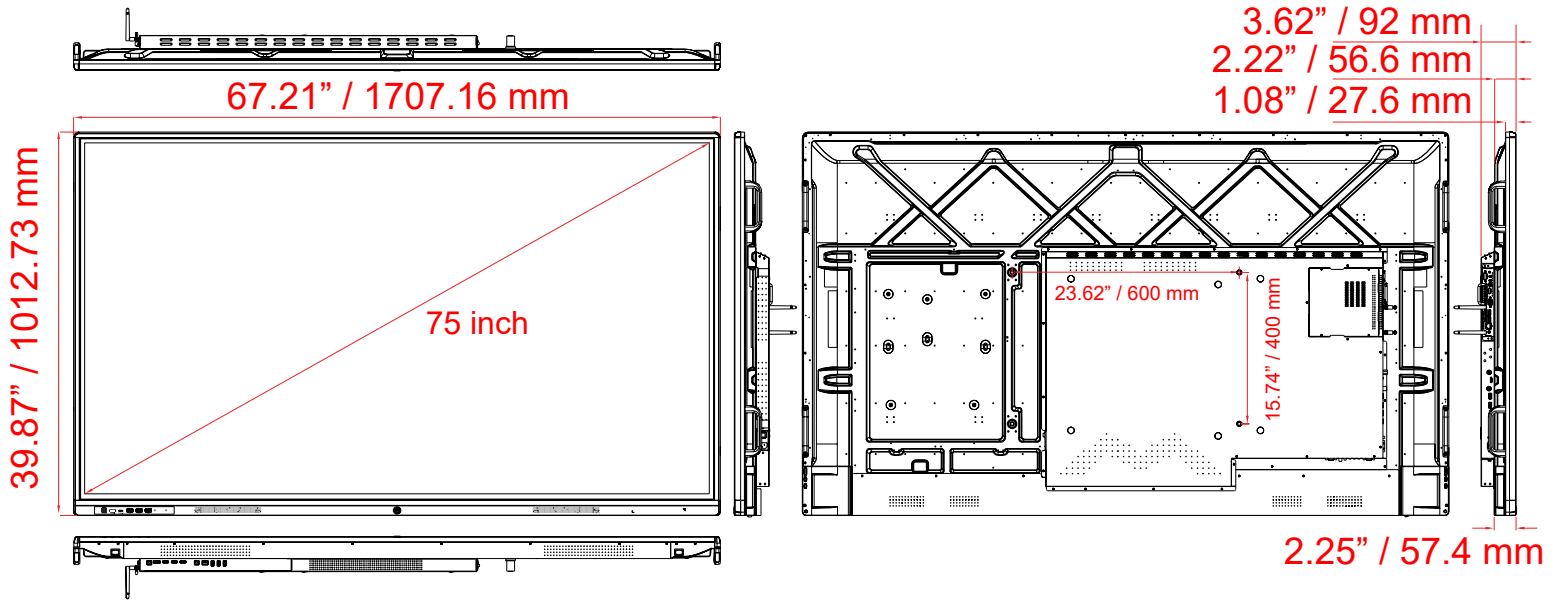


INTERFACE



FRONT

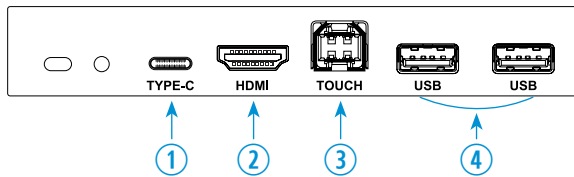

SIDE

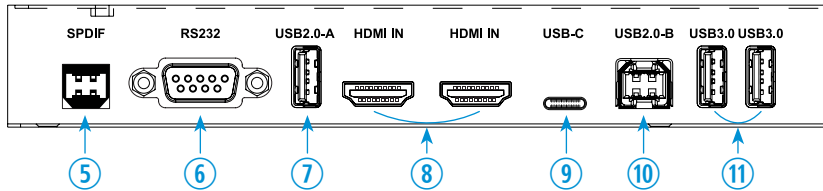

BOTTOM

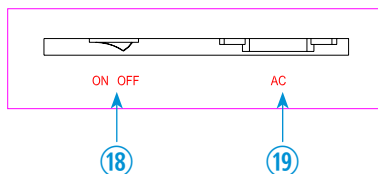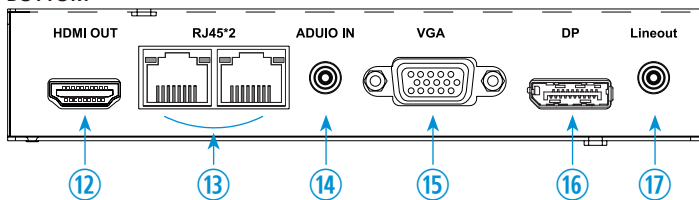

1. USB IN (TYPE-C) x 1
2. HDMI IN x 1
3. Touch (USB 2.0 TYPE-B) x 1
4. USB 3.0 IN (TYPE-A) x 2
5. SPDIF x 1
6. RS232 IN x 1
7. USB 2.0 IN (TYPE-A) x 1
8. HDMI IN x 2
9. USB IN (TYPE-C) x 1
10. USB 2.0 IN (TYPE-B) x 1
11. USB 3.0 IN (TYPE-A) x 2
12. HDMI OUT x 1
13. RJ-45 IN 1 & 2
14. PC AUDIO IN x 1
15. VGA IN x 1
16. DP IN x 1
17. LINE OUT x 1
18. POWER ON/OFF
19. AC 100-240V IN

Contact ViewZ

- Address : 1030 N ARMANDO ST., ANAHEIM, CA 92806
- Phone : (714) 996-1177, Fax : (714) 996-1138
- Sales : sales@viewzusa.com