



VZ-070RM-4K is a dual 7" rack mountable monitor featuring IPS screen that provides **3D LUT** and **4K**.



3Gbps SDI, automatically adapts to SMPTE and ITU digital video standards for 3G-SDI, HD-SDI and SD-SDI



Built-in 3D-LUT features 17 default logs and 6 user logs



Remote control through RJ-45 (LAN)



When HDR is activated, the display reproduces a greater dynamic range of luminosity, allowing lighter and darker details to be displayed more clearly. Effectively enhancing the overall picture quality. Support ST2084 300/1000/10000 and HLG



A 1920x1200 resolution & use 7" IPS panel with wide viewing angles 160°x160°



Audio meters are used to measure the level of an audio signal.

MODEL #		VZ-070RM-4K
<b>DISPLAY</b>		
Screen Size	7" (IPS Panel) x 2	
Max. Resolution	1920 x 1200 pixel	
Pixel Pitch	0.07875 x 0.07875 mm	
Brightness	400 cd/m <sup>2</sup> (Typical)	
Contrast Ratio	2000 : 1	
Aspect Ratio	16 : 10	
Viewing Angle (H/V)	160° / 160°	
<b>INTERFACE</b>		
3G SDI In / Out	(1 / 1) x 2	
HDMI (2.0) In / Out	(1 / 1) x 2	
RJ-45 (Remote Control)	1	
<b>INPUT FORMAT</b>		
SDI	SMPTE 425M-Level A	1080p / 60,59.94,50 1920 x 1080i / 60,59.94,50
	SMPTE-274M	1920 x 1080p / 30,29.97,25,24,23.98 pfs 1920 x 1080i / 60,59.94,50
	SMPTE-292M	1280 x 720p / 60,59.94,50
	SMPTE-296M	480i / 59.94
	ITU-R BT.656	576i / 50
HDMI		2160p / 60, 50, 30, 25, 24
		1080p / 60, 50, 30, 25, 24
		1080i / 60, 50
		720p / 60, 50
<b>DIMENSIONS</b>		
Outline Dimension	(W x H x D) (inch)	18.89 x 5.18 x 1.15"
	(W x H x D) (mm)	480 x 131.6 x 29.3 mm
Net Weight	4.84 lb / 2.2 kg	
<b>GENERAL</b>		
Power	Electrical Ratings	DC 12~24V (AC 100 ~ 240V)
	Consumption	≤ 16 W
Warranty	2 Years	
Operating Temperature	32 ~ 122°F / 0 ~ 50°C	
Humidity at High Operating Temperature	10 ~ 90% RH	
Storage Temperature	-4 ~ 158°F / -20 ~ 70°C	
Package Include	Manual x 1, Tally Cable x 1, Power Adapter x 1	


### VZ-070RM-4K ADVANTAGES

- 7" Dual IPS Panel | LED Backlight Adjustment
- One Front Assignable Function Button | Tally (Red, Green) Support
- HDR (HLG/ST 2064 300/1000/10000 ) Supported
- Aspect Ratio - Full, 16:9, 4:3, 1.85:1, 2.35:1
- Time Code, Peaking, Freeze, Overscan
- False Color, Histogram, Exposure, Check Field
- Audio Level Meter
- Pixel to Pixel On/Off
- Screen Color Mode: Blue, Red, Green & Mono
- Zoom - Off, x2, x4, x6, x8


### Contact ViewZ

- Address : 177 W. Orangethorpe Ave., Placentia, CA 92870
- Phone : (714)996-1177, Fax : (714)996-1138
- Sales : sales@viewzusa.com


### DIMENSIONS

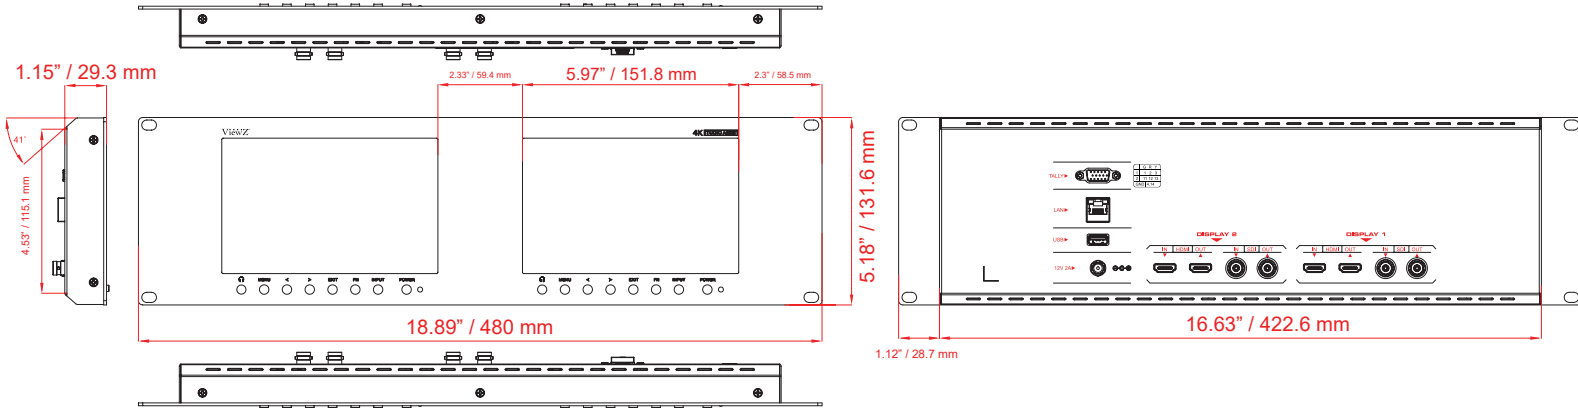

### INTERFACE

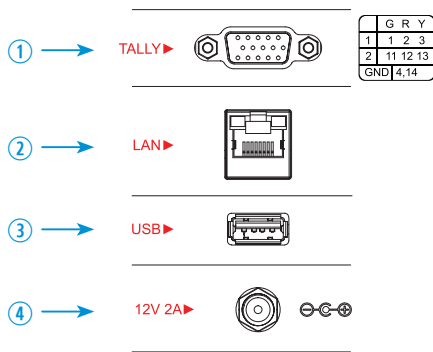

1. Tally
2. RJ45 - Remote Control
3. USB IN
4. DC 12V IN
5. HDMI IN x OUT
6. 3G-SDI IN x OUT
7. HDMI IN x OUT
8. 3G-SDI IN x OUT

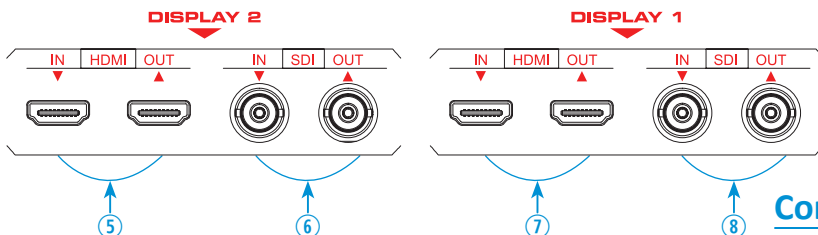

### Contact ViewZ

- Address : 177 W. Orangethorpe Ave., Placentia, CA 92870
- Phone : (714)996-1177, Fax : (714)996-1138
- Sales : sales@viewzusa.com