



When HDR is activated, the display reproduces a greater dynamic range of luminosity, allowing lighter and darker details to be displayed more clearly. Effectively enhancing the overall picture quality.



Featuring an amazing 1000 cd/m² high bright LCD screen, with sunshine readable screen which cover 101% Rec. 709 color space, therefore the gear suitable for any innovative outdoor framing.



Multiple Video Interface (3G-SDI, HDMI, VGA and Analog Video) provided.



With Audio Level Meter turned on, it is used to monitor current audio output and avoid being indifferent after an audio interruption as well as keep the sound within a reasonable DB range.

MODEL #		VZ-156LED-HDR
DISPLAY		
Screen Size		15.6"
Max. Resolution		1920 x 1080 (Full HD) IPS pixel
Pixel Pitch		0.17925 mm x 0.17925 mm
Brightness		1000 cd/m ² (Typical)
Contrast Ratio		1000 : 1
Aspect Ratio		16 : 9
Viewing Angle (H/V)		178° / 178°
Color Space		101% Rec. 709
HDR		ST2084 300/1000/10000/HLG
INTERFACE		
3G-SDI In / Out		1 / 1 (Loopthrough)
HDMI 1.4b In		1
VGA		1
AV		1
Input Format		
SD-SDI/HD-SDI/3G-SDI (Level A&B)		1080p (24/25/30/50/60p), 1080i (50/60p), 720p(50/60p)
HDMI		2160p (24/25/30p), 1080p (24/25/30/50/60p), 1080i (50/60p), 720p(50/60p)
AUDIO		
Built in speaker		1W x 2
SDI		16ch 48kHz 24 bit
HDMI		8ch 24 bit
Ear Jack		3.5 mm - 2ch 48kHz 24 bit
DIMENSIONS & WEIGHT		
Outline Dimension	(W x H x D) (inch)	15.31 x 10.23 x 1.48"
	(W x H x D) (mm)	389 x 260 x 37.6 mm
Net Weight		6.32 lbs (2.87 kg)
GENERAL		
Power	Electrical Ratings	DC 12~24V
	Consumption	≤ 24 W (15V)
Warranty		2 Years
Operating Temperature		-22 ~ 158°F / -30 ~ 70°C
Humidity at High Operating Temperature		90% RH for 240 hrs, TA=+ 140°F (60°C)
Storage Temperature		-4 ~ 140°F / -20 ~ 60°C
Battery Plate		V-mount / Anton Bauer mount (Option)
Package Include		12V DC Adapter x 1, Manual x 1, VGA Cablex1, HDMI A/A Cable x1, AV Cable x1, Rack Mount Bracket Set x1, Desktop Stand Set x 1


VZ-156LED-HDR ADVANTAGES

- HDR supports HDR10-300 / HDR-1000 / HDR-10000 / HLG under SDI and HDMI modes
- Markers - Center Marker and Safety Markers
95%, 93%, 90%, 88%, 85%, 80%
- Aspect Ratio - Full, 1.85 : 1, 2.35 : 1, 4 : 3, 3 : 2
- Zoom - x1.5, x2, x3, x4
- Image Flip - H, V, H & V
- Freeze On & Off
- Front Function Button enable to assign one of functions - Center Marker, Display Scan, Aspect Ratio, Freeze, HDR and Image Flip


Contact ViewZ

- Address : 177 W. Orangethorpe Ave., Placentia, CA 92870
- Phone : (714) 996-1177, Fax : (714) 996-1138
- Sales : sales@viewzusa.com

DIMENSIONS

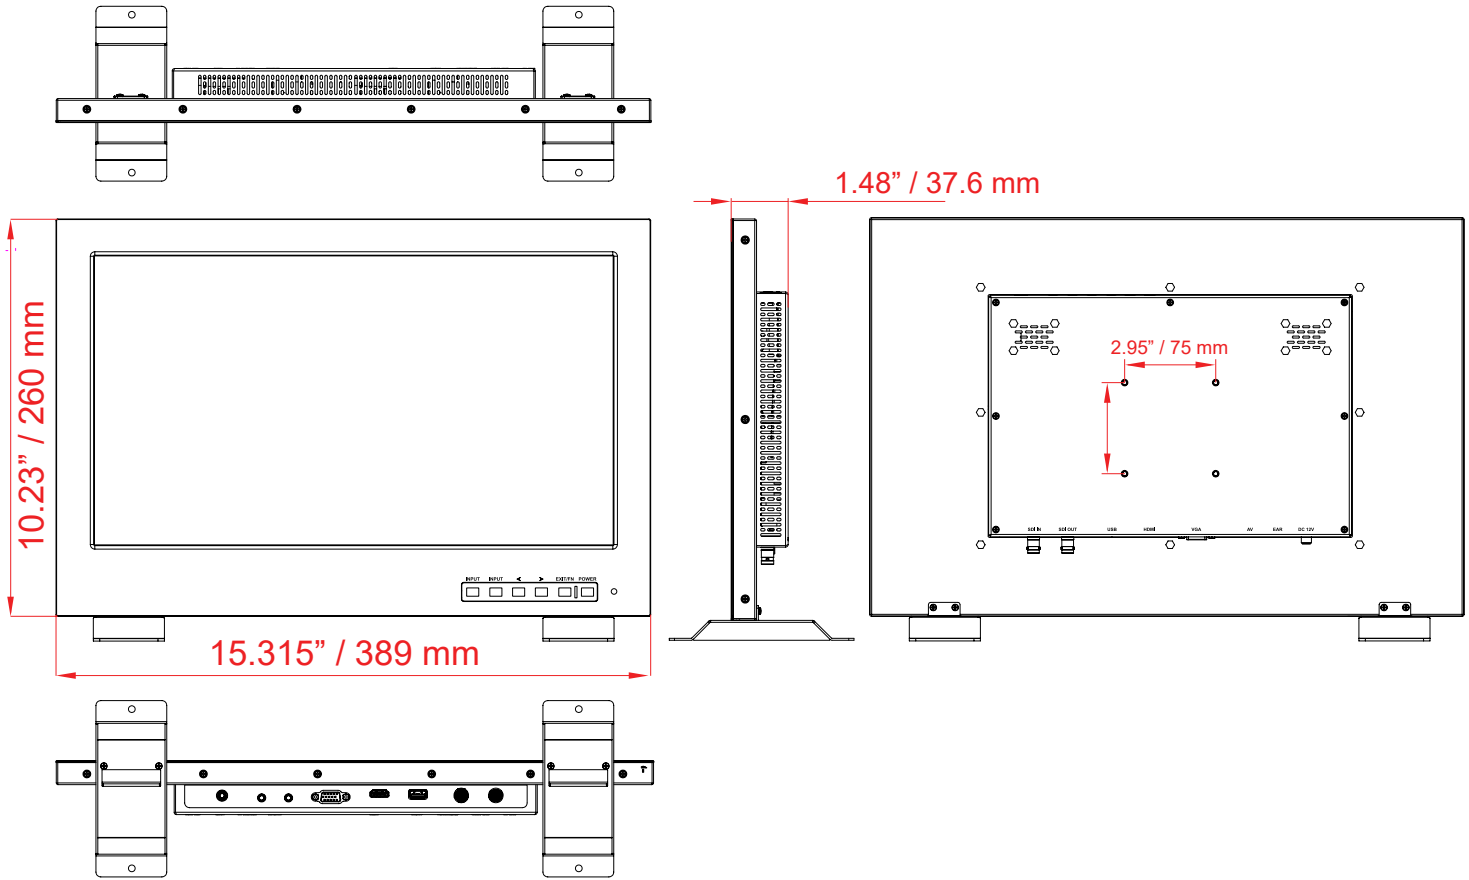

INTERFACE

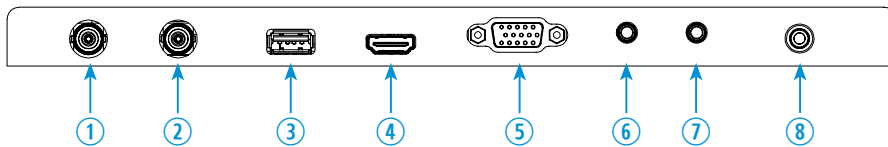

1. 3G-SDI IN
2. 3G-SDI OUT
3. USB IN
4. HDMI IN
5. VGA IN
6. AV (3.5mm) IN
7. PC STEREO IN
8. DC 12V IN

Contact ViewZ

- Address : 177 W. Orangethorpe Ave., Placentia, CA 92870
- Phone : (714) 996-1177, Fax : (714) 996-1138
- Sales : sales@viewzusa.com