



When HDR is activated, the display reproduces a greater dynamic range of luminosity, allowing lighter and darker details to be displayed more clearly. Effectively enhancing the overall picture quality.



Featuring an amazing 1000 cd/m² high bright LCD screen, with sunshine readable screen which cover 101% Rec. 709 color space, therefore the gear suitable for any innovative outdoor framing.



Multiple Video Interface (3G-SDI, HDMI, VGA and Analog Video) provided.



With Audio Level Meter turned on, it is used to monitor current audio output and avoid being indifferent after an audio interruption as well as keep the sound within a reasonable DB range.



It can be installed and fixed on the wall or the 19-inch Rack through the VESA 75x75 mm/ 100 x 100mm screw points at its back. Optional Wall Mount Adaptors or 19-inch Rack Adaptor (VZ-RMK08) is available


MODEL #	VZ-215LED-HDR
DISPLAY	
Screen Size	21.5"
Max. Resolution	1920 x 1080 (Full HD) IPS pixel
Pixel Pitch	0.24825 mm x 0.24825 mm
Brightness	1000 cd/m ² (Typical)
Contrast Ratio	1500 : 1
Aspect Ratio	16 : 9
Viewing Angle (H/V)	170° / 170°
Color Space	101% Rec. 709
HDR	ST2084 300/1000/10000/HLG
INTERFACE	
3G-SDI In / Out	1 / 1 (Loopthrough)
HDMI 1.4b In	1
VGA	1
AV	1
Input Format	
3G-SDI (Level A&B)	1080p(60/59.94/50/30/29.97/25/24/23.98/24sf/30sf/29.97sf/25sf/23.98sf) 1080i(60/59.94/50)
HD-SDI	1080p(30/29.97/25/24/23.98/30sf/29.97sf/25sf/24sf/23.98sf) 1080i(60/59.94/50) 720p(60/59.94/50/30/29.97/25/24/23.98)
SD-SDI	480i(59.94), 576i(50)
HDMI 1.4	2160p(30/29.97/25/24/23.98), 1080p(60/50/30/29.97/25/24/23.98), 1080i(60/50)
AUDIO	
Built in speaker	1W x 2
SDI	16ch 48kHz 24 bit
HDMI	8ch 24 bit
Ear Jack	3.5 mm - 2ch 48kHz 24 bit

DIMENSIONS & WEIGHT		
Outline Dimension	(W x H x D) (inch)	20.66 x 12.33 x 0.78"
	(W x H x D) (mm)	524.8 x 313.3 x 19.8 mm
Net Weight		10.56 lbs (4.8 kg)
GENERAL		
Power	Electrical Ratings	DC 12~24V
	Consumption	≤ 36 W (15V)
Warranty		2 Years
Operating Temperature		32 - 122°F / 0 - 50°C
Humidity at High Operating Temperature		90% RH for 240 hrs, TA=+ 140°F (60°C)
Storage Temperature		-4 - 140°F / -20 - 60°C
Battery Plate		V-mount / Anton Bauer mount (Option)
Package Include		12V DC Adapter x 1, Manual x 1, Desktop Stand Set x 1


Contact ViewZ

- Address : 177 W. Orangethorpe Ave., Placentia, CA 92870
- Phone : (714) 996-1177, Fax : (714) 996-1138
- Sales : sales@viewzusa.com

DIMENSIONS

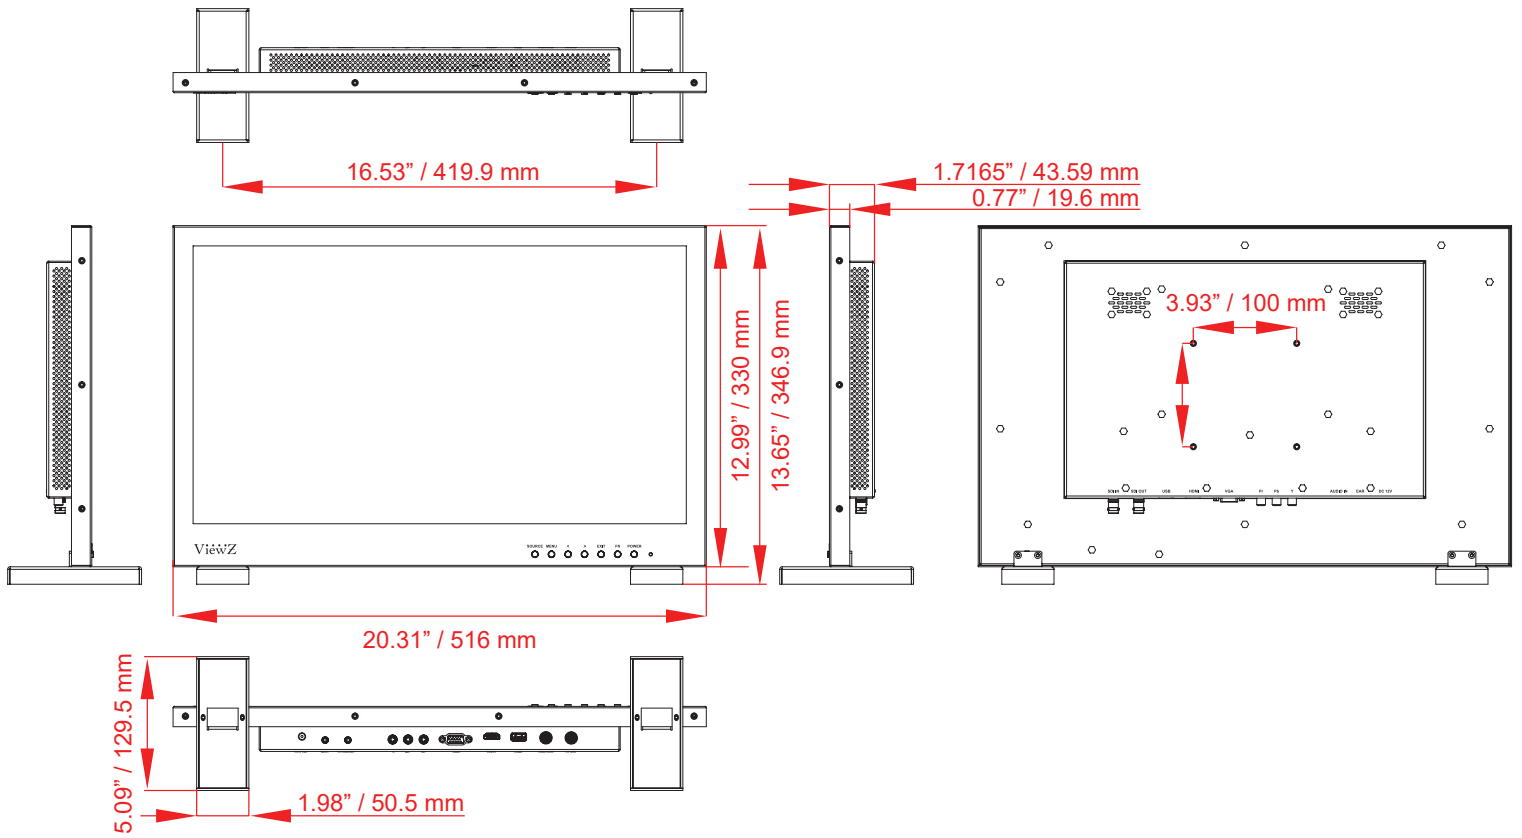

INTERFACE

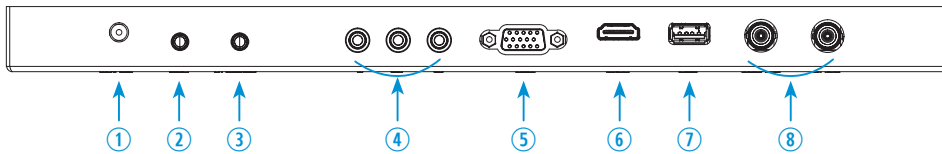

1. DC 12V IN
2. SPEAKER OUT
3. PC STEREO IN
4. COMPONENT IN
5. VGA IN
6. HDMI IN
7. USB IN
8. 3G-SDI IN / OUT

Contact ViewZ

- Address : 177 W. Orangethorpe Ave., Placentia, CA 92870
- Phone : (714) 996-1177, Fax : (714) 996-1138
- Sales : sales@viewzusa.com