




### VZ-215LED-L1 ADVANTAGES

- 21.5" 1080p HD Resolution
- HDMI, VGA, SD/HD/3G-SDI (Level A/B), COMPONENT
- Blue Mono, Built-in 2 Speakers
- SDI Embedded Audio Level Meter / 2ch Displays (out of 16ch)
- Center Marker / Safety Area / Corner
- Scan - Zero, Over and pixel to pixel
- Front Function Assignable Button
- 2-Year Warranty

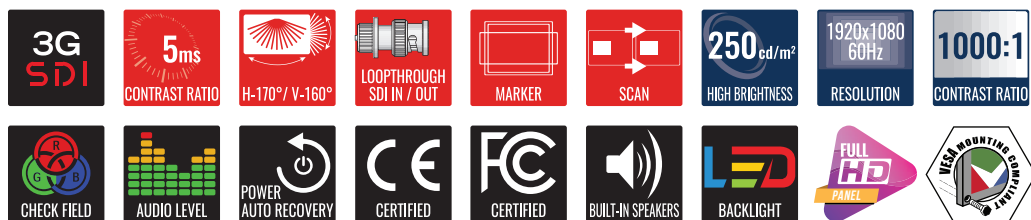


MODEL #		VZ-215LED-L1
<b>DISPLAY</b>		
Screen Size	21.5"	
Max. Resolution	1920 x 1080 @60Hz	
Pixel Pitch	0.24825 mm x 0.24825 mm	
Brightness	250cd/m <sup>2</sup> (Typical)	
Contrast Ratio	1000:1	
Aspect Ratio	16 : 9	
Viewing Angle (H/V)	170° / 160°	
Display Color	16.7 Million	
Response Time	< 5 ms	
<b>INTERFACE</b>		
Component In	3	
3G-SDI In / Out	1 / 1 (BNC, 1 input / loop-through out)	
VGA In (15Pin D-Sub)	1	
HDMI In	1	
USB In	1	
Speaker Out	1	
PC Stereo In	1	
<b>AUDIO</b>		
Built in Speaker	2W x 2	
<b>DIMENSIONS &amp; WEIGHT</b>		
Outline Dimension (W x H x D)	20.32 " x 13.65" x 1.72"	
	516.0 mm x 346.9 mm x 43.6 mm	
Net Weight	8.4 lbs / 3.8 kg	
<b>MOUNT</b>		
VESA	100mm x 100mm / M4 x L10 Screws	
<b>GENERAL</b>		
Power	Electrical Ratings	DC12V (AC100 ~ 240V[50/60Hz])
	Consumption	≤ 24 W
Warranty	2 Year	
Operating Temperature	32 - 104°F / 0 ~ 40°C	
Regulation	FCC(A), CE	
Compatible Mounts	Wall	VZ-WM05, VZ-WM11, VZ-AM01
	Ceiling	VZ-CM308, VZ-CMKIT-01, VZ-CMKIT-02
	RACK	VZ-RMK08

INPUT FORMAT		
SDI	SMPTE 425M-A & B (YCbCr 4:2:2)	1080p ( 60/59.94/50 )
	SMPTE 274M (YCbCr 4:2:2)	1080i (60/59.94/50)
		1080p (30/29.97/25/24/23.98)
		1080Psf (30/29.97/25/24/23.98)
		720P(60/59.94/50/30/29.97/25/24/23.98)
ANALOG	SMPTE 296M (YCbCr 4:2:2)	525i (NTSC 59.94)
	SMPTE 125M (YCbCr 4:2:2)	625i (PAL 50)
	ITU-R BT.601 (YCbCr 4:2:2)	2048 x 1080P (24/23.98/24sf/23.98sf)
HDMI	2K Format (YCbCr 4:2:2)	1080P (60/59.94/50, 30/29.97/25/24/23.98)
	COMPONENT	1080i (60/59.94/50), 720P(60/59.94/50)
VGA		480i/480P/576i/576P/1080i/1080P
		VGA, SGA, XGA, SXGA, WXGA, WUXGA
SPECIAL FEATURES		
Line Marker Option		3:2, 4:3, 1.85:1, 2.35:1, Off
Safety Area Option		Off, 80%, 85%, 88%, 90%, 93% and 95%
SDI Sound Channel Option		Two (2) Channels out of sixteen (16) channels
RGB Gain		-128 to 128
RGB Bias		-128 to 128


### Contact ViewZ

- Address : 177 W. Orangethorpe Ave., Placentia, CA 92870
- Phone : (714) 996-1177, Fax : (714) 996-1138
- Sales : sales@viewzusa.com

### DIMENSIONS

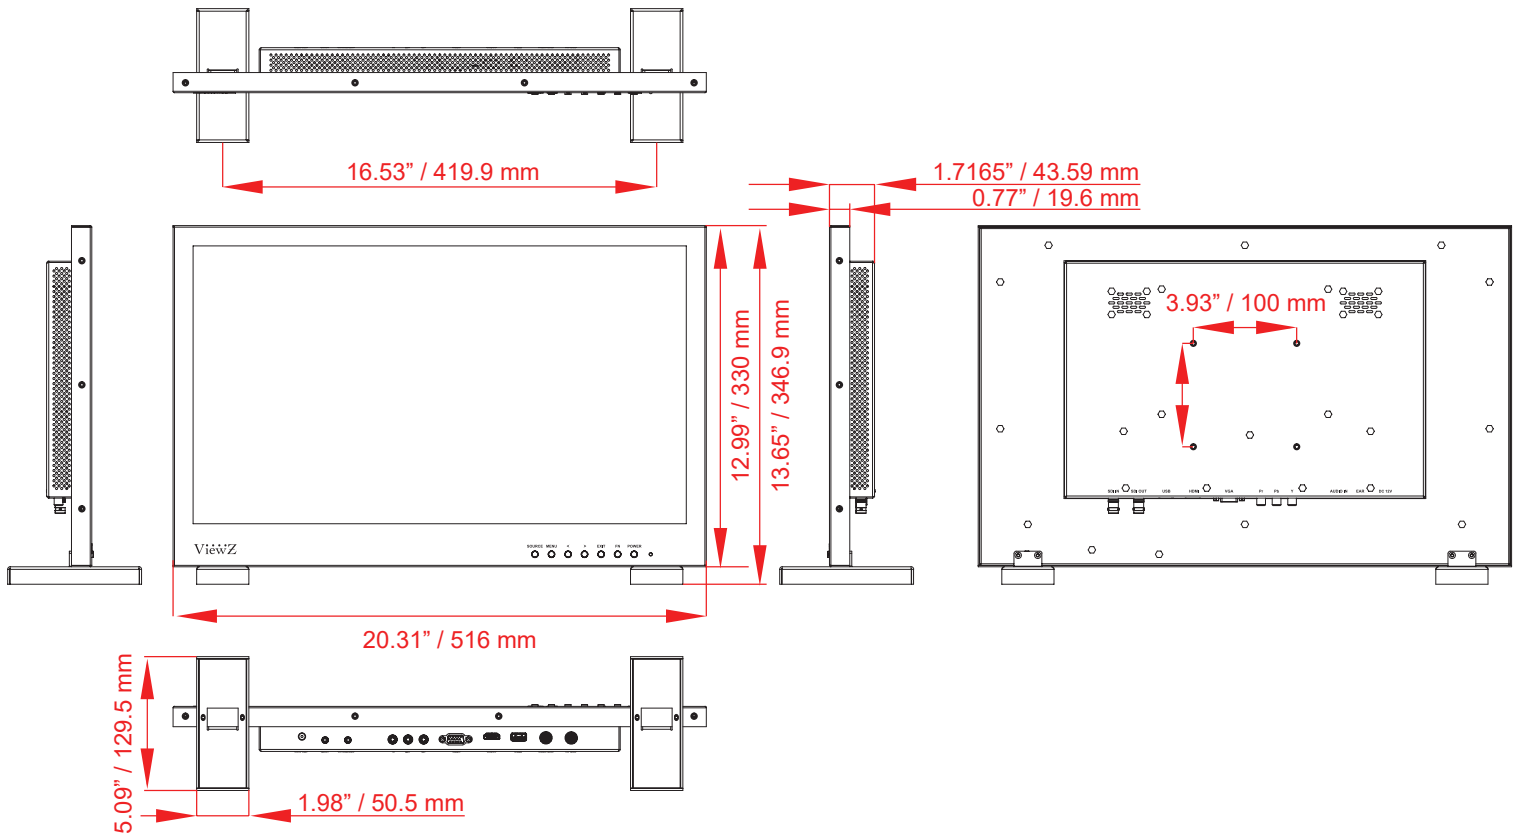

### INTERFACE

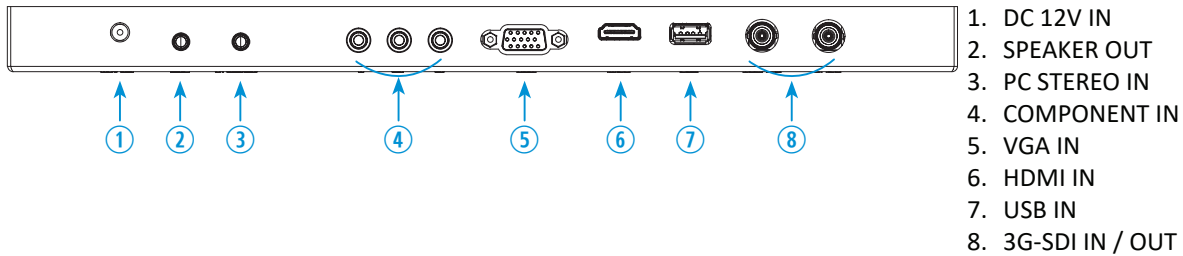

### Contact ViewZ

- Address : 177 W. Orangethorpe Ave., Placentia, CA 92870
- Phone : (714) 996-1177, Fax : (714) 996-1138
- Sales : sales@viewzusa.com