


### SPECIFICATIONS

<b>Focal Length</b>	6.5 - 65 mm
<b>Maximum Relative Aperture</b>	1:1.4
<b>Iris</b>	F1.4 - Approx. 360 (With ND Spot Filter)
<b>Zoom Ratio</b>	10 X
<b>Angular Field of View</b>	40.5° x 31.0° at 6.5 mm 4.2° x 3.2° at 65 mm
<b>Image Format</b>	4.8 x 3.6 mm (Ø6 mm)
<b>Minimum Object Distance</b>	1.2 m ( From Front Vertex )
<b>Object Dimensions at M.O.D.</b>	82.4 x 63.3cm at 6.5 mm 8.4 x 6.4cm at 65 mm
<b>Optical Back Focal Distance</b>	9.85 mm (In Air)
<b>Flange Back</b>	12.5 mm
<b>Input Signal</b>	Composite Video Signal, Video Signal
<b>Sensitivity Adjustment</b>	0.5 ~ 1.0Vp-p ( Image Signal )

<b>Photometry Range</b>	Approx. 40% - 70% Variable to Vp-p
<b>Input Impedance</b>	High Impedance
<b>Operation</b>	<b>Zoom</b> Motorized (DC +/- 6.4V, Max 40mA) Speed Approx. <b>6.5sec.</b> <b>Focus</b> Motorized (DC +/- 6.4V, Max 40mA) Speed Approx. <b>6.5sec.</b> <b>Iris</b> EE (DC+8.5 to 16V : Fixed Voltage, Max50mA) Speed Within 4sec.(Auto Close System)
<b>EE Mechanism</b>	The built-in EE Amp amplifies the difference between the video signal from the camera and the Iris signal level.
<b>EE Accuracy</b>	With Input Video Signal 0.7Vp-p Within +/-10% of Mean Value
<b>Operation Temperature</b>	- 10 °C ~ 50 °C / 14 °F ~ 122 °F
<b>Mount</b>	CS-Mount (Adjustable Lens Position)
<b>Front Thread</b>	43 mm P0.75
<b>Size, Weight</b>	70(W) x 65(H) x 104.3(D) mm, Approx. 285g

### DIMENSIONS

UNIT: mm

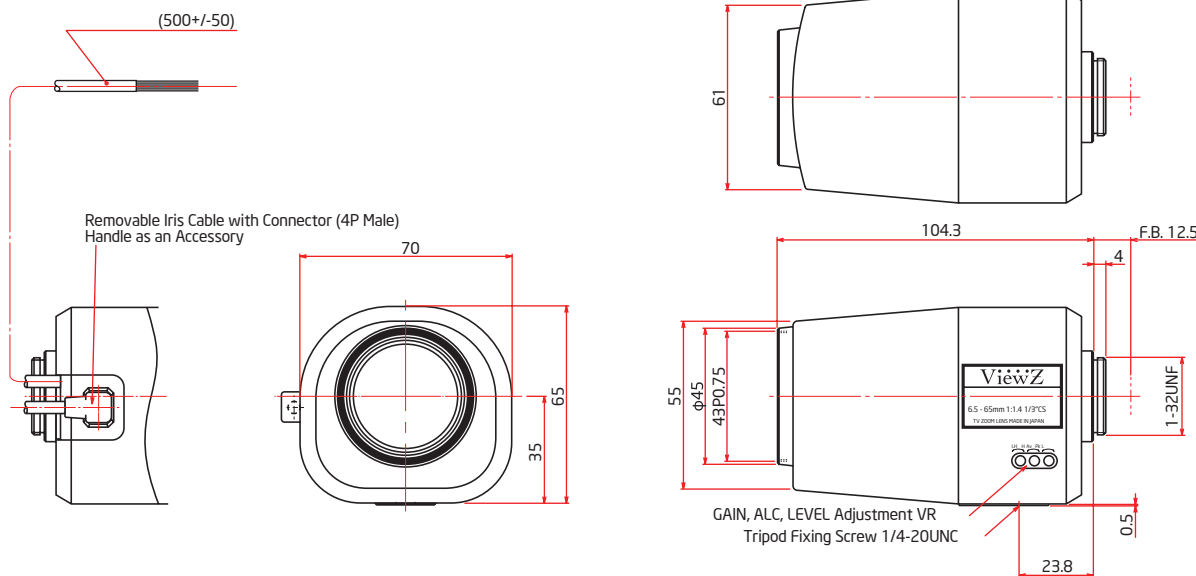

### CIRCUIT DIAGRAM

