ViewZ®
www.viewzusa.com

VZ-55ENB

55" EXTREME NARROW BEZEL LED VIDEO WALL MONITOR

NDAA COMPLIANT

VZ-55ENB ADVANTAGES

- 55" 1080p CCTV LED Monitor
- Extreme Narrow **0.9 mm** Metal Bezel
- Supports Max 4K (3840x2160)/60 Video Signal & Serial Control Software
- Supports HDMI (2.0) In/Out, DVI-D In, DP In, VGA In
- Supports HDCP 1.4 / 2.2
- Daisy Chain System - HDMI up to 15 x 15
- Auto Source & Power Recovery
- Mullion Compensation Applied
- Advanced Heat Management
- Digital / Analog Inputs
- 3D Comb-Filter & High Contrast
- Built to run 24/7/365
- 3-Year Warranty

MODEL #		VZ-55ENB
VIDEO		
Screen Size		55"
Max. Resolution		1920 x 1080 @60Hz
Pixel Pitch		0.630mm x 0.630mm
Brightness		500cd/m²(Typical)
Contrast Ratio		1000:1
Aspect Ratio		16 : 9
Viewing Angle (H/V)		178° / 178°
Display Color		1.06 B (10 Bit)
Response Time		< 8ms
INTERFACE		
VGA In (15Pin D-Sub)		1
DP In		1
DVI-D In		1
HDMI 1 In		1
HDMI 2 In / Out (Daisy Chain)		1 / 2
USB In (Upgrade)		1
RS-232 (RJ-45) In		1 (Serial Control / IR Receiver)
RS-232 (RJ-45) Out		2 (Serial Control)
Audio Out		1
SPECIAL FEATURES		
Bezel Width	TOP and LEFT Side	0.035" / 0.9 mm
	BOTTOM and RIGHT Side	0.035" / 0.9 mm
	ACTIVE AREA to ACTIVE AREA	0.070" / 1.8 mm (Bezel to Bezel)
Advanced Anti-Image Residual Correlation		Support
3D Comb-Filter		Support
Language		English, Spanish, French and Portuguese
SUPPORT RESOLUTION		
HDMI 1 (2.0) In		3840 x 2160 @ 60Hz
HDMI 2 (2.0) In / Out		3840 x 2160 @ 60Hz
DP In		3840 x 2160 @ 30Hz
DVI-D In		3840 x 2160 @ 30Hz
VGA In		1920 x 1080 @ 60Hz

DIMENSIONS & WEIGHT		
Outline Dimension (W x H x D)		47.72" x 26.89" x 4.69"
		(1212.26 mm x 683.06 mm x 119.35 mm)
Net Weight / Gross Weight		65.91 lb (29.9 kg) / 88.18 lb (40.0 kg)
MOUNT		
Universal		600 x (100 x 4) mm, M8 x 10 Screws
GENERAL		
Transmitter - IR Remote Control		YES
Power	Electrical Ratings	AC100 ~ 240V (50/60Hz)
	Consumption	180 W (Max) / 0.5 W (Standby)
Regulations		FCC, RoHS
Warranty	Parts/ Labor	3 Year / 3 Year
Operating Temperature		32 - 120°F / 0 - 50°C
Storage Temperature		32 - 140°F / 0 - 60°C
Operating Humidity (Non-Condensing)		20% ~ 80% RH
Compatible Mounts	Wall	VZ-XMS, VZ-WM71
	Ceiling	VZ-CMKiT-04
	Free Standing Mount	VZ-FSM2x2, VZ-FSM3x2
Package Includes		Manual x 1, Power Cable x 1, HDMI Cable x 1, CAT5 Cable x 1, Converter (RJ45 to RS232) x 1, Remote Control x 1, IR Receiver x 1

Contact ViewZ

- Address : 177 W. Orangethorpe Ave., Placentia, CA 92870
- Phone : (714) 996-1177, Fax : (714) 996-1138
- Sales : sales@viewzusa.com

* Design and specifications are subject to change without notice.

ViewZ®
www.viewzusa.com

VZ-55ENB

55" EXTREME NARROW BEZEL LED VIDEO WALL MONITOR

DIMENSIONS

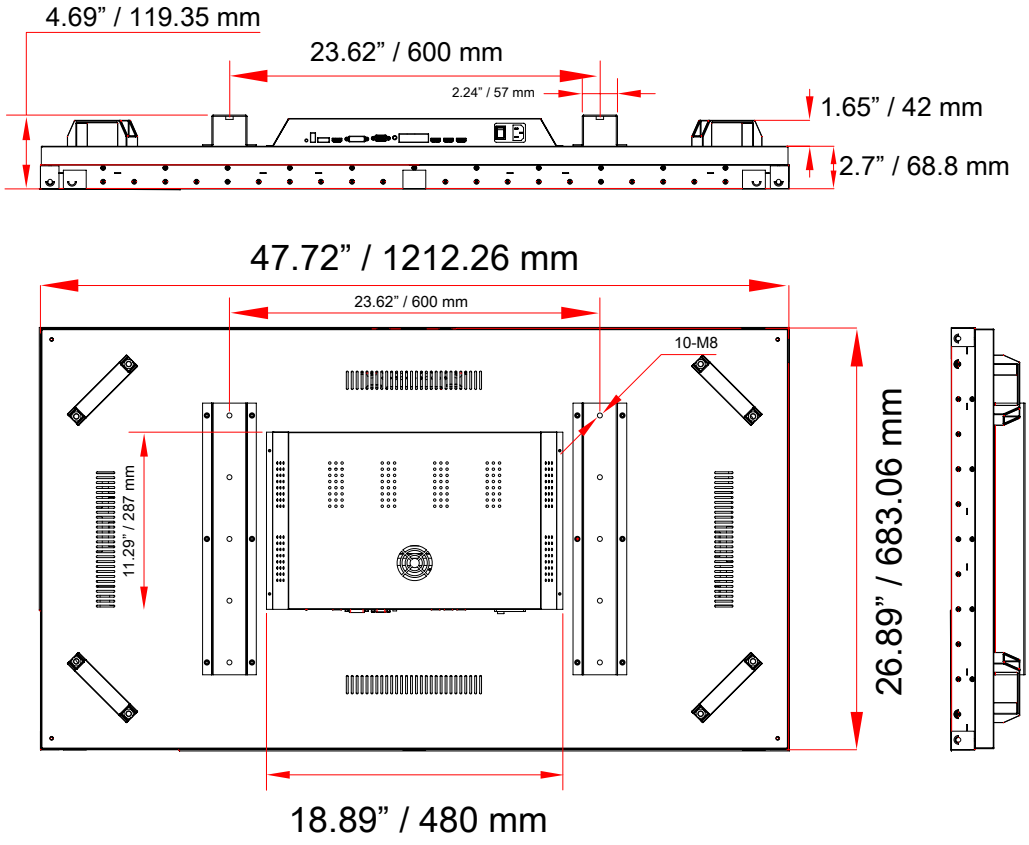

INTERFACE

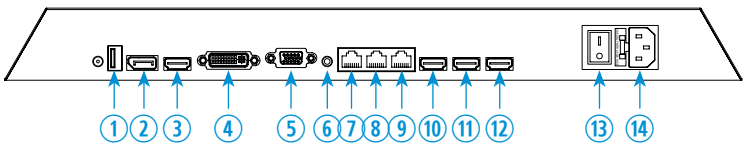

1. USB - For upgrading SW
2. DP IN
3. HDMI 1 IN
4. DVI-D IN
5. VGA IN
6. AUDIO OUT
7. RS232 (RJ-45) IN - Serial Control / IR Receiver
8. RS232 (RJ-45) OUT - A - Serial Control
9. RS232 (RJ-45) OUT - B - Serial Control
10. HDMI 2 IN (Daisy Chain)
11. HDMI 2 OUT - A (Daisy Chain)
12. HDMI 2 OUT - B (Daisy Chain)
13. POWER ON / OFF Switch
14. AC 100-240V IN

Contact ViewZ

- Address : 177 W. Orangethorpe Ave., Placentia, CA 92870
- Phone : (714) 996-1177, Fax : (714) 996-1138
- Sales : sales@viewzusa.com

* Design and specifications are subject to change without notice.