

## Open Pluggable Specification for UHD 4K MONITOR



### VZ-OPS ADVANTAGES


- Compatible with VZ-UHD series
- Custom Interface / Specification is available
- Powerful system with the Intel® Core™ i5 7200U processor, 8GB (Upto 16GB) DDR4 RAM & 128GB (Upto 512GB) SSD storage
- Complete network support WiFi 2.4GHz/5GHz, bluetooth, and gigabit LAN ethernet
- Supports 4K (3840X2160) resolution
- Selectable Window OS system
- Enhanced thermal design supports broader range of Intel® processors
- Enables new and customizable functionality through an additional connector interface that can be enhanced further with Intel® FPGAs
- Optimized for interactive white boards (IWBs), commercial digital signage, kiosks, visual data devices, video walls, and more
- Ability to customize a protocol and simultaneously support advanced use cases including real-time analytics and video capture performed on the display itself

MODEL #	VZ-OPS
<b>SYSTEM SPECIFICATION</b>	
Processor	Intel® Mobile Core™ i5 7200U
Socket	Intel® Socket Support (Coffee Lake-U)
Chipset	Intel® Coffee Lake-U
RAM	8GB DDR (Up to 16GB)
Storage	128GB SSD (Up to 512GB)
Sound	Integrated High Definition Audio (Built-in)
Graphic	Integrated Intel® Display (Built-in)
Wireless 802.11 abgn-AC (2.4GHz/5GHz)	Intel® AC3165 / 2 x Antenna
Bluetooth	Above Ver. 4.2
<b>INTERFACE</b>	
HDMI (2.0) Out	1 (support 4K @60Hz)
USB In (2.0/3.0)	2 / 2
USB Type-C	1
RJ45 (10/100/1000 M) In (Gigabit LAN)	1 / 1
Bluetooth	1 (Ver. 4.2)
PC Audio In / Out	1 / 1


<b>DIMENSIONS &amp; WEIGHT</b>		
Outline Dimension (W x H x D)	7.87 x 1.14 x 4.65" / 200 x 30 x 118.11 mm	
Net Weight	2.2 lbs / 1 kg	
<b>GENERAL</b>		
Power	Electrical Ratings	DC 12 ~ 19V (Internal Module)
	Consumption	≤ 35 W / ≤ 0.5 W (Standby)
Housing	Metal	
Heating Control	Single Fan	
TPM (Trusted Platform Module)	Option	
Intel® vPro™	Option (Advanced security with multifactor identity protection)	
Intel® Unite®	Option ( Easy Content Sharing )	
Operating Temperature	32 ~ 104°F / 0°C ~ 40°C	
Operating Humidity	10 ~ 90% RH	
Storage Temperature	-4 ~ 140°F / -20°C ~ 60°C	
Storage Humidity	10 ~ 90% RH	

## Open Pluggable Specification for UHD 4K MONITOR

### DIMENSIONS

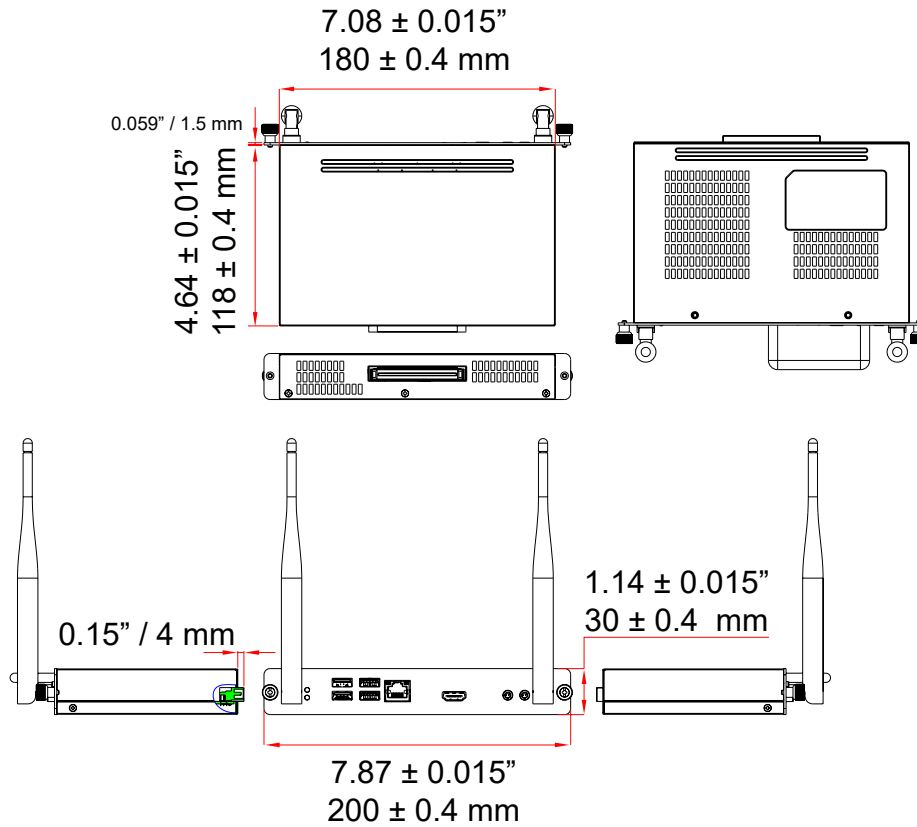

### INTERFACE

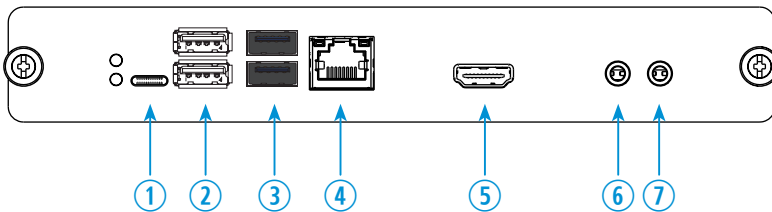

1. USB (Type C) x1
2. USB 2.0 (Type A) x2
3. USB 3.0 (Type A) x2
4. RJ45 In x1
5. HDMI Out x1
6. AUDIO Out x1
7. AUDIO In x1

### Contact ViewZ

- Address : 177 W. Orangethorpe Ave., Placentia, CA 92870
- Phone : (714) 996-1177, Fax : (714) 996-1138
- Sales : sales@viewzusa.com