



VZ-215LED-L1 ADVANTAGES

- 21.5" 1080p HD Resolution
- HDMI, VGA, SD/HD/3G-SDI (Level A/B), COMPONENT
- Blue Mono, Built-in 2 Speakers
- SDI Embedded Audio Level Meter / 2ch Displays (out of 16ch)
- Center Marker / Safety Area / Corner
- Scan - Zero, Over and pixel to pixel
- Front Function Assignable Button
- 2-Year Warranty




MODEL #		VZ-215LED-L1
DISPLAY		
Screen Size		21.5"
Max. Resolution		1920 x 1080 @60Hz
Pixel Pitch		0.24825 mm x 0.24825 mm
Brightness		250cd/m ² (Typical)
Contrast Ratio		1000:1
Aspect Ratio		16 : 9
Viewing Angle (H/V)		170° / 160°
Display Color		16.7 Million
Response Time		< 5 ms
INTERFACE		
Component In		3
3G-SDI In / Out		1 / 1 (BNC, 1 input / loop-through out)
VGA In (15Pin D-Sub)		1
HDMI In		1
USB In		1
Speaker Out		1
PC Stereo In		1
AUDIO		
Built in Speaker		2W x 2
DIMENSIONS & WEIGHT		
Outline Dimension (W x H x D)		20.32 " x 13.65" x 1.72" 516.0 mm x 346.9 mm x 43.6 mm
Net Weight		8.4 lbs / 3.8 kg
MOUNT		
VESA		100mm x 100mm / M4 x L10 Screws
GENERAL		
Power	Electrical Ratings	DC12V (AC100 ~ 240V[50/60Hz])
	Consumption	≤ 24 W
Warranty	Parts/ Labor	2 Year / 2 Year
Operating Temperature		32 - 104°F / 0 ~ 40°C
Regulation		FCC(A), CE
Compatible Mounts	Wall	VZ-WM05, VZ-WM11, VZ-AM01
	Ceiling	VZ-CM308, VZ-CMKIT-01, VZ-CMKIT-02
	RACK	VZ-RMK08

INPUT FORMAT		
SDI	SMPTE 425M-A & B (YCbCr 4:2:2)	1080p (60/59.94/50)
	SMPTE 274M (YCbCr 4:2:2)	1080i (60/59.94/50)
		1080p (30/29.97/25/24/23.98)
		1080Psf (30/29.97/25/24/23.98)
		720P(60/59.94/50/30/29.97/25/24/23.98)
		SMPTE 296M (YCbCr 4:2:2)
ANALOG	SMPTE 125M (YCbCr 4:2:2)	625i (PAL 50)
	ITU-R BT.601 (YCbCr 4:2:2)	2048 x 1080P (24/23.98/24sF/23.98sF)
	COMPONENT	1080P (60/59.94/50, 30/29.97/25/24/23.98)
HDMI		1080i (60/59.94/50), 720P(60/59.94/50)
	VGA	480i/480P/576i/576P/1080i/1080P
		VGA, SGA, XGA, SXGA, WXGA, WUXGA
SPECIAL FEATURES		
Line Marker Option		3:2, 4:3, 1.85:1, 2.35:1, Off
Safety Area Option		Off, 80%, 85%, 88%, 90%, 93% and 95%
SDI Sound Channel Option		Two (2) Channels out of sixteen (16) channels
RGB Gain		-128 to 128
RGB Bias		-128 to 128


Contact ViewZ

- Address : 177 W. Orangethorpe Ave., Placentia, CA 92870
- Phone : (714) 996-1177, Fax : (714) 996-1138
- Sales : sales@viewzusa.com
- Specification subject to change without notice.

DIMENSIONS

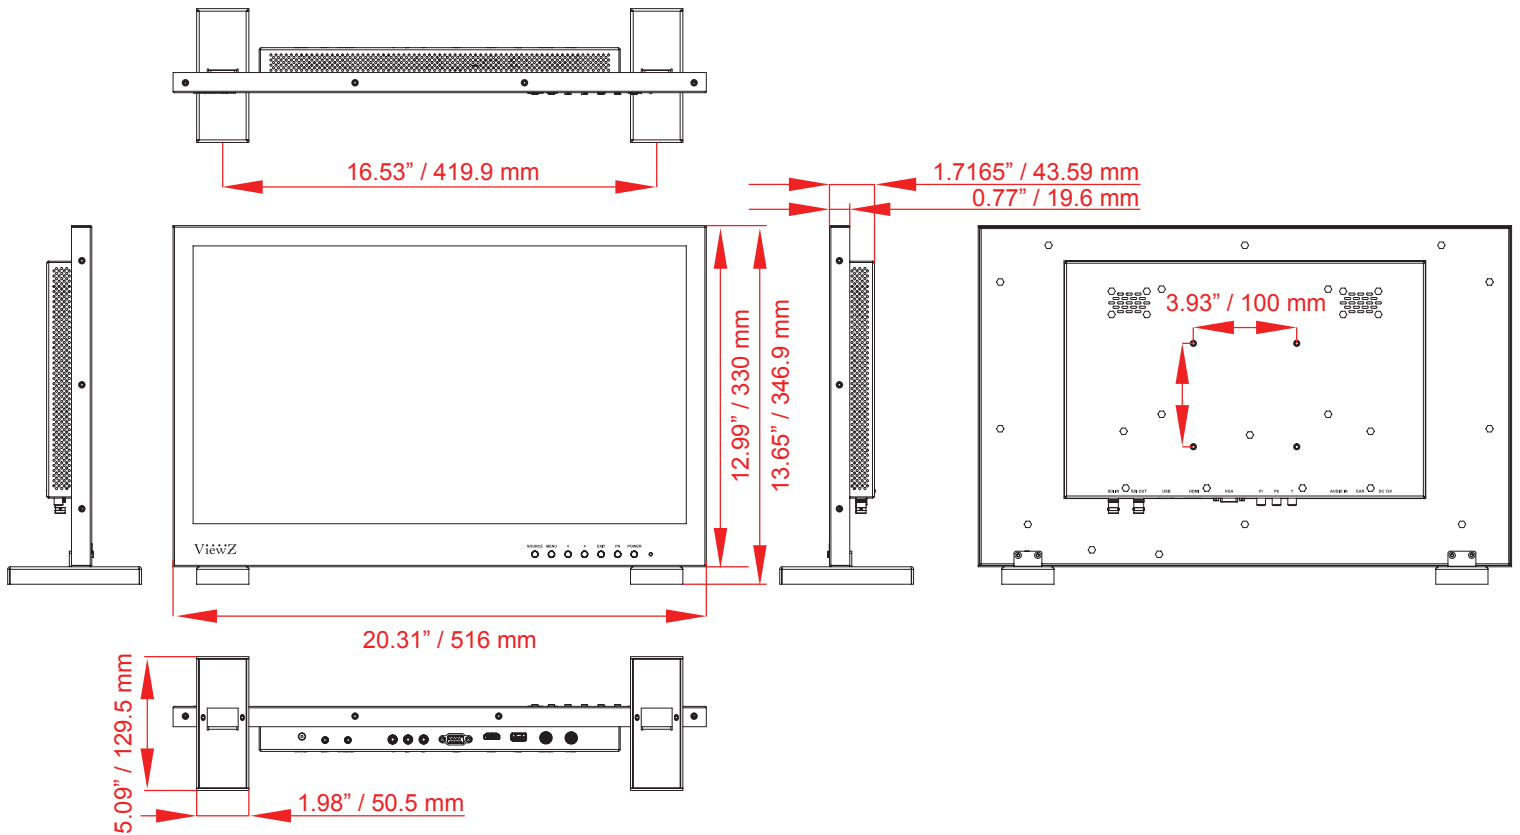

INTERFACE

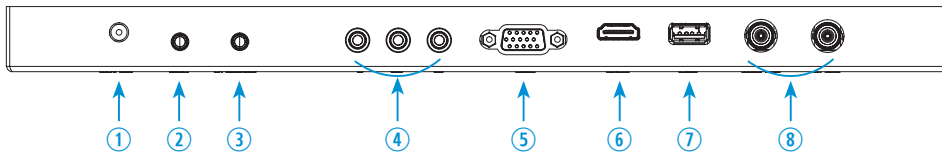

1. DC 12V IN
2. SPEAKER OUT
3. PC STEREO IN
4. COMPONENT IN
5. VGA IN
6. HDMI IN
7. USB IN
8. 3G-SDI IN / OUT

Contact ViewZ

- Address : 177 W. Orangethorpe Ave., Placentia, CA 92870
- Phone : (714) 996-1177, Fax : (714) 996-1138
- Sales : sales@viewzusa.com
- Specification subject to change without notice.